

# PRODUCT CATALOGUE









Rodex Power is the international brand specialized in different kinds of tools including power tools, air tools, wood working tools, metal working tools, cutting tools, industial tools, garden tools, agriculture tools, and accessories for over 20 years with the premium quality collection of the tools which make Rodex Power as the unique tools brand in the world on the basis of Variety and Quality.

For Rodex Power, quality means products that are designed to provide more benefits and comfort to professional users; improved productivity and efficiency, time saving, reduced effort and simplicity of operation.

Rodex Power continues to invest its resources in advanced R&D, High – end technologies and compatible human resources, to develop more efficient Tools with high variety that meet the tomorrow's needs of the users.

Rodex Power tries to get the satisfaction of all users by providing Premium Quality products and services in the field of power tools, air tools, wood working tools, metal working tools, cutting tools, industial tools, garden tools, agriculture tools... and also providing an appropriate combination of price, quality, satisfying services and fast delivery.





⑦ RODEXPOWER.COM ② 合 D RODEXTOOLS


# **INDEX OF PRODUCTS** ·




# **ONE BATTERY FOR ALL TOOLS.**

In the **ONE FOR ALL 20V** system, a single battery works for all tools. Simply insert the **20V ONE FOR ALL** battery into the tool and you can start using it immediately. Thanks to the exchangeable battery, the running time is extended with just one movement. It couldn't be simpler or more flexible.



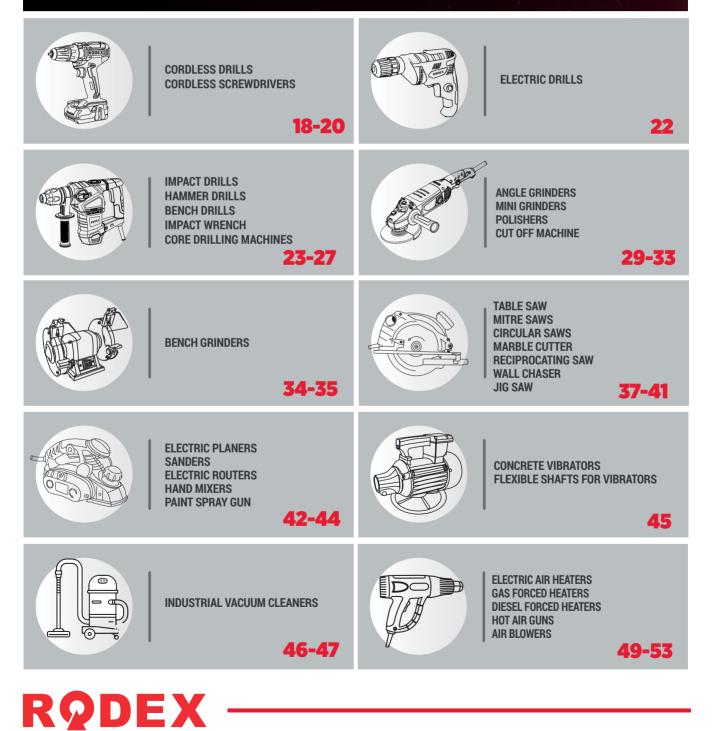

# **INDEX OF PRODUCTS**

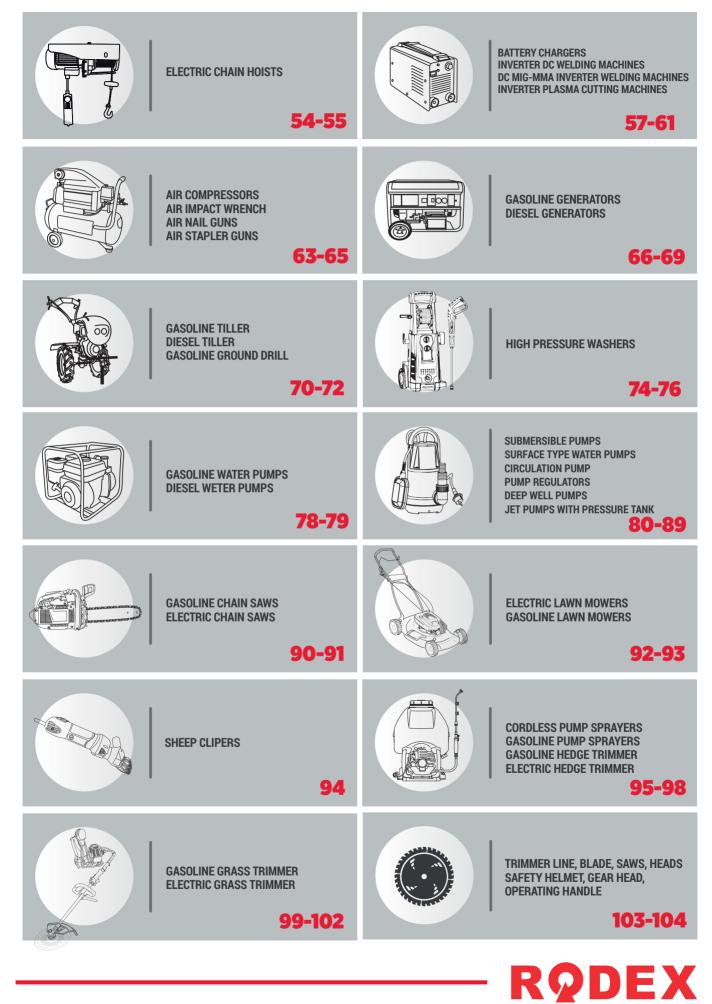






# **BRUSHLESS MOTOR** ECHNOLOG

I MORE EFFICIENT WORK WITH BRUSHLESS ENERGY. **I MORE POWER & LONGER RUNNING TIMES** LONGER SERVICE LIFE & COMPACT DESIGN

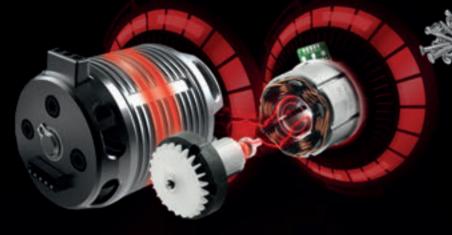









# LITHIUM-ION Technology

## HIGH-PERFORMANCE. HIGHLY EFFICIENT LITHIUM-ION CELLS Up to 4 times longer use compared to the standard batteries

Advantages of Lithium-Ion Batteries:

- Compact and lightweight
- Continuous work for longer periods
   When not in use for a long time; no breakdown and no self-discharge is seen.
- Decrease in capacity is not a risk









FREEDOM TO CHOOSE THE PROPER BATTERY ACCORDING TD THE WORK AND POWER TOOL

 $\bigcirc$ 



RODEX

ETTRAN







# RQDEX



# **RPX2340F**

**Cordless Brushless Impact Drill** 



Motor	BRUSHLESS		2XBAILEN &
Battery	20V-2.0Ah Li-ion Double Battery		
Speed	0-500 / 0-1800 rpm		
Impact	0-28800 bpm		
Torque Adjust	20+1+1+1	Accessories	
Max. Torque	50 NM	13 pcs	
Chuck	13 MM Keyless Meta	I	
Pcs.	5		
Net Weight	? Kg		
			I

# **RPX2340**

**Cordless Brushless Impact Drill** 



Motor	BRUSHLESS	
Speed	0-500 / 0-1800 rpm	88.88A
Impact	0-28800 bpm	
Torque Adjust	20+1+1+1	
Max. Torque	50 NM	
Chuck	13 MM Keyless Metal	Accessories 13 pcs
Pcs.	5	
Net Weight	2,8 Kg	

## **RPX2330F Cordless Brushless Drill**



# **RPX2330 Cordless Brushless Drill**



Motor	BRUSHLESS	
Speed	0-500/0-1800 rpm	888.88A
Torque Adjust	19+1	
Max. Torque	50 NM	AARAAA
Chuck	13 MM Keyless Metal	Accessories
Pcs.	5	13 pcs
Net Weight	2.8 Ka	







# **R2DEX**

# **RPX2350F**

Cordless Brushless Drill



Motor	BRUSHLESS	1	
Battery	20V-2.0Ah Li-ion Double Battery		<b>Girakger Frick</b>
Speed	0-550 / 0-2000 rpm		
Torque Adjust	19+1	ABBAAA	
Max. Torque	80 NM	Accessories	
Chuck	13 MM Keyless Metal	13 pcs	
Pcs.	5		
Net Weight	? Kg		

# **RPX2350**

**Cordless Brushless Drill** 



Motor	BRUSHLESS	
Speed	0-550 / 0-2000 rpm	88.88
Torque Adjust	19+1	
Max. Torque	80 NM	
Chuck	13 MM Keyless Metal	Accessories
Pcs.	5	13 pcs
Net Weight	2,8 Kg	

## **RPX2360F** Cordless Brushless Impact Drill



# RPX2360 Cordless Brushless Impact Drill



Motor	BRUSHLESS	
Speed	0-550 / 0-2000 rpm	888.88
Impact	0-8800 / 0-32000 bpm	
Torque Adjust	20+1+1+1	AA
Max. Torque	80 NM	Accessories
Chuck	13 MM Keyless Metal	13 pcs
Pcs.	5	
Net Weight	2,8 Kg	

. . . . . . . . . . . . . . . . . . .

~~~

? Kg

Net Weight



20V



# RPX232OF Cordless Impact Drill

| Chuck         | ear Stage | Speed<br>Adjustment<br>Carry Case  |                       | A                                   |
|---------------|-----------|------------------------------------|-----------------------|-------------------------------------|
| Battery       |           | 20V-2.0Ah Li-ion<br>Double Battery | 88.88A                | <b>24. BATTERY 8</b><br>Clanger McK |
| Speed         |           | 0-500 / 0-1800 rpm                 |                       |                                     |
| Impact        |           | 0-19200 bpm                        | AABAAA                |                                     |
| Torque Adjust |           | 19+1+1+1                           | Accessories<br>13 pcs |                                     |
| Max. Torque   |           | 50 NM                              | 13 pcs                |                                     |
| Chuck         |           | 13 MM Keyless Met                  | al                    |                                     |
| Pcs.          |           | 5                                  |                       |                                     |
|               |           |                                    |                       |                                     |

# **RPX2320**

**Cordless Impact Drill** 



| Speed         | 0-500 / 0-1800 rpm  |                       |
|---------------|---------------------|-----------------------|
| Impact        | 0-19200 bpm         |                       |
| Torque Adjust | 19+1+1+1            |                       |
| Max. Torque   | 50 NM               | 00000                 |
| Chuck         | 13 MM Keyless Metal | Accessories<br>13 pcs |
| Pcs.          | 5                   |                       |
| Net Weight    | 2,8 Kg              |                       |
|               |                     |                       |

# RPX2310F Cordless Drill

? Kg

Net Weight



| Battery       | 20V-2.0Ah Li-ion<br>Double Battery | <b>22X BATTERY &amp;</b><br><b>CHARGER PACK</b> |
|---------------|------------------------------------|-------------------------------------------------|
| Speed         | 0-500 / 0-1800 rpm                 |                                                 |
| Torque Adjust | 20+1+1+1                           |                                                 |
| Max. Torque   | 50 NM                              |                                                 |
| Chuck         | 13 MM Keyless Metal                | Accessories<br>13 pcs                           |
| Pcs.          | 5                                  |                                                 |
| Net Weight    | ? Kg                               |                                                 |

## RPX2310 Cordless Drill



| Speed         | 0-500 / 0-1800 rpm  | 0.0.20      |
|---------------|---------------------|-------------|
| Torque Adjust | 20+1+1+1            |             |
| Max. Torque   | 50 NM               |             |
| Chuck         | 13 MM Keyless Metal | Accessories |
| Pcs.          | 5                   | 13 pcs      |
| Net Weight    | 2,8 Kg              |             |



# **R2DEX**

## RPX2390 Cordless Impact Driver

| 180NM<br>Torque Adjust       LED lighting       Speed<br>Adjustment         Left & right<br>rotating       Carry Case |  |
|-----------------------------------------------------------------------------------------------------------------------|--|

| Speed       | 0-2400 rpm        |
|-------------|-------------------|
| Impact      | 0-3600 bpm        |
| Chuck       | 1/4" (6.35mm) HEX |
| Max. Torque | 180 NM            |
| Pcs.        | 5                 |
| Net Weight  | 1.2 Kg            |

# **RPX2380**

**Cordless Impact Wrench** 



| Sheen       | 0-2400 rpm |                                    |  |
|-------------|------------|------------------------------------|--|
| Impact      | 0-3600 bpm |                                    |  |
| Max. Torque | 180 NM     | 66                                 |  |
| Driver Size | 1/2 inches | 17-19-20-21MM<br>Accessories 4 pcs |  |
| Pcs.        | 5          | Accessories 4 pcs                  |  |
| Net Weight  | 2,8 Kg     |                                    |  |
|             |            |                                    |  |

# RPX2370 Cordless Rotary Hammer



----

# RPX2375 Cordless Rotary Hammer



1 1 3

# **R2DEX**



# RPX2150

Cordless Angle Grinder



| Disc Diameter  | 115 mm   |
|----------------|----------|
| Speed          | 8000 rpm |
| Spindle Thread | M14      |
| Pcs.           | 4        |
| Net Weight     | 3,3 Kg   |


# RPX2540 Cordless Circular Saw



# RPX2155

**Cordless Angle Grinder** 





| WIOLOI         | BRUSHLESS |
|----------------|-----------|
| Disc Diameter  | 125 mm    |
| Speed          | 8500 rpm  |
| Spindle Thread | M14       |
| Pcs.           | 4         |
| Net Weight     | 3,3 Kg    |

# RPX2520 Cordless Jigsaw



| Speed         | 0-3000 rpm |
|---------------|------------|
| Depth of Cut  | 60 mm      |
| Stroke Length | 18 mm      |
| Pcs.          | 5          |
| Net Weight    | 1,6 Kg     |



# **RPX2530**

# **Cordless Reciprocating Saw**









| Speed              | 0-3000 rpm                   |
|--------------------|------------------------------|
| Stroke amplitude   | 22 mm                        |
| Max. Cutting       | Wooden: 100mm<br>Metal: 50mm |
| Quick blade change | Yes                          |
| Pcs.               | 4                            |
| Net Weight         | 1,6 Kg                       |

# RPX2250 Cordless Orbital Sander



| Speed                     | 0-10000 rpm |
|---------------------------|-------------|
| Disc Diameter             | 125 mm      |
| Vacuum Cleaner Connection | Yes         |
| Pcs.                      | 4           |
| Net Weight                | 1,25 Kg     |
|                           |             |

# **RPX2280**

**Cordless Planer** 



| Planer Depth              | 0-1.25mm |
|---------------------------|----------|
| Vacuum Cleaner Connection | Yes      |
| Pcs.                      | 4        |
| Net Weight                | 2,15 Kg  |
|                           |          |

RPX2260 Cordless Sander



# **R2DEX**



# **RPX2410**

Cordless Nailer - Stapler



| Speed             | 60 nails/min      |
|-------------------|-------------------|
| Magazine Capacity | 80 nails          |
| Stapler Size      | 15-25mm           |
| Nail Size         | 15-20-25-30-32 mm |
| Pcs.              | 5                 |
| Net Weight        | 2,6 Kg            |

## **RPX2620** Cordless Grass-Hedge Trimmmer



| Speed                                   | 1200 rpm |
|-----------------------------------------|----------|
| Cutting Thickness                       | 7.6 mm   |
| Sher Blade Size                         | 92 mm    |
| Hedge Trimmer Blade Size (Double sided) | 199 mm   |
| Pcs.                                    | 4        |
| Net Weight                              | 1,97 Kg  |

# **RPX2415**

Cordless Nailer - Stapler



# RPX2630 Cordless Brushless Pruner



| Motor              | BRUSHLESS |
|--------------------|-----------|
| Speed              | 20000 SPM |
| Half - Max cutting | 25-33 mm  |
| Blade length       | 92 mm     |
| Cutting Forced     | 55 N.M.   |
| Pcs.               | 10        |
| Net Weight         | 1,85 Kg   |



# **RQDEX**

## **RPX2270 Cordless Polishing Machine**





Ę, Constant peed Contro

| Disc Diameter | 250 mn |
|---------------|--------|
| Spood         | 0500   |

| Disc Diameter | 250 mm   |
|---------------|----------|
| Speed         | 2500 rpm |
| Pcs.          | 2        |
| Net Weight    | 2 Kg     |

# **RPX2610** Cordless Blower 2 in 1








| Max Speed  | 63 mph    |
|------------|-----------|
| Vacuity    | ≥ 4,5 kpa |
| Pcs.       | 2         |
| Net Weight | 2 Kg      |







# HIGH-PERFORMANCE, HIGHLY EFFICIENT LITHIUM-ION CELLS

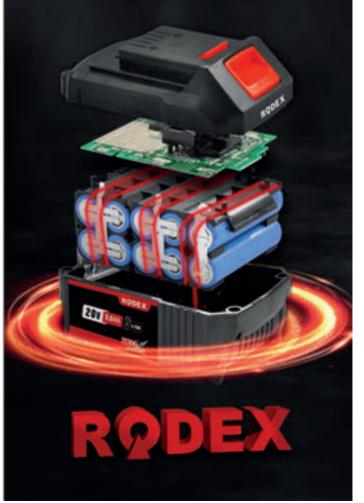

T I 🔊 🖚



# **RED X POWER BATTARIES**





# **RED X POWER CHARGERS**

**RPX2070 RPX2080 RPX2090** Voltage 2.4A **4**A 2 x 3,5A Charging time 45 min. **30** min. **35** min. 2.0 Ah 3.0 Ah **65** min. 45 min. **55** min. 4.0 Ah 70 min. 100 min. **60** min. 6.0 Ah 105 min. 150 min. **90** min.



# RDX340

**Cordless Impact Drill** 



5

Pcs

# RDX3365 Cordless Drill



3 Kg

5

# RDX3404

**Cordless Impact Drill** 



# RDX3375 Cordless Drill

Pcs



5

Net Weight

Pcs

## RDX3365A Cordless Drill


# 18.0 Volt 🗲

- » Keyless Chuck, Ease of quick tip changing
- » Led light, The ease of working in the dark
- » 18+1 Adjustment Torque
- » 2 Gear Stage
- » 2x 18B 2,0 A
- » LI-ION BATTERIES
- » Left-Right Rotation
- » Battery level indicator
- » Belt Hook,
- » Carry Case

### **Accessories Content**

Soft pipe 1 pcs 25mm Sleeve sockets 9 pcs 5mm 6mm 7mm 8mm 9mm 10mm 11mm 12mm 13mm Long connecting rod 1 pcs 50mm Short connecting rod 1 pcs Screw bit 1 pcs 50mm Wood flat drill 3 pcs 10mm 12mm 14mm Twist drill bits 3 pcs 5mm 6mm 8mm Twist drill bits 3 pcs 5mm 6mm 8mm Cement drill bit 3 pcs 5mm 6mm 8mm

| Power      | 18 V / 2.0A Li-ion |
|------------|--------------------|
| Torque     | 30 NM              |
| Chuck      | 10 mm              |
| Speed      | 0-350 / 0-1350RPM  |
| Net Weight | 3,5 Kg             |
| Pcs        | 5                  |





TT TP 🞸 🎅 🍠 🗮 😹

\_`es

# **RDX3375A**

**Cordless Drill** 

28 PCS. ACCESSORIES




- » Keyless Chuck, Ease of quick tip changing
- » Led light, The ease of working in the dark
- » 18+1 Adjustment Torque
- » 2 Gear Stage
- » 2x 21B 2,0 A
- » LI-ION BATTERIES
- » Left-Right Rotation
- » Battery level indicator
- » Belt Hook,
- » Carry Case

| 21 V / 2.0A Li-ion |
|--------------------|
| 35 NM              |
| 10 mm              |
| 0-350 / 0-1350RPM  |
| 3,5 Kg             |
| 5                  |
|                    |



## Soft pipe 1 pcs 25mm

Sleeve sockets 9 pcs 5mm 6mm 7mm 8mm 9mm 10mm 11mm 12mm 13mm Long connecting rod 1 pcs 50mm Short connecting rod 1 pcs Screw bit 1 pcs 50mm Wood flat drill 3 pcs 10mm 12mm 14mm Twist drill bits 3 pcs 5mm 6mm 8mm Wood drill bit 3 pcs 5mm 6mm 8mm Cement drill bits 3 pcs 5mm 6mm 8mm





TP 🎸 🍠 🍠 🗮 😹 

## **RDX331 Cordless Screwdriver**





# **RDX308 Cordless Screwdriver**



Power

Speed

Pcs

- A more elegant appearance thanks to the transparent box.
- 53 pieces screwdriver bits.
- Easy access to more difficult areas thanks to its transformable structure.
- Working in dark areas thanks to the auxiliary LED light.

| Power       | 3.6V / 1.5A Li-ion |
|-------------|--------------------|
| Max. Torque | 4 NM               |
| Speed       | 0-210 RPM          |
| Net Weight  | 1,1 Kg             |
| Pcs         | 8                  |
|             |                    |













1000

rodexpower.com (f) (b) (rodextools



"T T 🐨 🗲 🍠 🗐 🖼 👞 🛶

## RDX151 Electric Drill

# Automatic Chuck Speed Adjustment Lock Switch Back to de sight

- » Rotate left and right
- » Belt Hook

| Power             | 500 W      |
|-------------------|------------|
| Drilling Capacity | 10 MM      |
| Speed             | 0-2600 RPM |
| Net Weight        | 1,9 Kg     |
| Pcs               | 10         |

# RDX154 Electric Drill



| Power             | 240 W     |
|-------------------|-----------|
| Drilling Capacity | 10 MM     |
| Speed             | 0-800 RPM |
| Net Weight        | 2,33 Kg   |
| Pcs               | 6         |

# **RDX1504**

**Electric Drill** 



| Power             | 450 W      |
|-------------------|------------|
| Drilling Capacity | 10 MM      |
| Speed             | 0-2600 RPM |
| Net Weight        | 1,5 Kg     |
| Pcs               | 10         |

## RDX153 Electric Drill



» Rotate left and right

|                | ) MM    |
|----------------|---------|
| 0              |         |
| Speed 0-7      | 750 RPM |
| Net Weight 1,4 | 42 Kg   |
| Pcs 10         | )       |

-**\*\*\* \*\*\* \*\*\*** 🗐 **RDX1551 Impact Drill** 



**RDX1550** 

Pcs

Net Weight

Power 850 W **Drilling Capacity** 13 MM Speed 0-2700 RPM Net Weight 2,0 Kg

10



RODEX



5,5 Kg

5

# 3



5

Net Weight

"3 "R "P 🖉 🄗 🚚 🗮 👞 🛶



## RDX234 Rotary Hammer Drill



Ŕ

3 Eurotion

Power Accessorie 1500 Watt Concrete: 32mm **Drilling Capacity** Wood: 42mm Steel: 13mm Impact Power 5,5 Jull GREASE Impact Speed 4350 bpm Speed 0-880 rpm Pcs. 7,25 Kg Net Weight 2



| Drilling Capacity | Concrete: 30mm<br>Wood: 42mm<br>Steel: 13mm | Access |
|-------------------|---------------------------------------------|--------|
| Impact Power      | 5 Juli                                      |        |
| Impact Speed      | 4300 bpm                                    | GREASE |
| Speed             | 850 rpm                                     |        |
| Pcs.              | 7 Kg                                        |        |
| Net Weight        | 2                                           |        |

# RDX2402 Rotary Hammer Drill

1600 Watt





 » Tool transmission housing reinforced with magnesium alloy
 » Carry Case
 Power
 1600 Watt

| Drilling Capacity | Concrete: 30mm<br>Wood: 40mm<br>Steel: 13mm |
|-------------------|---------------------------------------------|
| Impact Power      | 10 Juli                                     |
| Impact Speed      | 3800 bpm                                    |
| Speed             | 630 rpm                                     |
| Pcs.              | 11 Kg                                       |
| Net Weight        | 2                                           |
|                   |                                             |



Ye-




## **RDX276 Rotary Hammer Drill**











| Power             | 1700 Watt    |
|-------------------|--------------|
| Drilling Capacity | Wood: 50mm   |
| Impact Power      | 27 Jull      |
| Impact Speed      | 950-1900 bpm |
| Speed             | 160-320 rpm  |
| Pcs.              | 18,5 Kg      |
| Net Weight        | 1            |



suitably to your position.





25


# 19 ip i 🤗 🍠 🖽 🚟 👞 🛶

## **RDX616 Bench Drill**



- 12 Stage Drilling Speed
- 550 Watt Powerful Engine
- •16 MM Drilling Capacity
- · 700 MM Vertical Middle Panel Movement,
- · 36 MM Column Diameter, Profile Fixing,
- Perforated Middle Panel
- · 290 \* 190 Mm Base With Mounting Hole
- · Dimensions: 30x100x65
- Copper Winding Motor

Pcs





## Power **Drilling Capacity** Drilling Speed Speed Net Weight 37,09 Kg 1

# **RDX309** 1/2" Electric Impact Wrench



## **RDX613 Bench Drill**

# 350 Watt

- 5 Stage Drilling Speed
- 350 Watt Powerful Engine
- •13 MM Drilling Capacity
- · Profile Fixing,
- Perforated Middle Panel
- Base With Mounting Hole · Dimensions: 20x60x40
- Copper Winding Motor



| Power             | 350 W         |  |
|-------------------|---------------|--|
| Drilling Capacity | 13 MM         |  |
| Drilling Speed    | 5 Speed Stage |  |
| Speed             | 620-2620 RPM  |  |
| Net Weight        | 16,8 Kg       |  |
| Pcs               | 1             |  |
|                   |               |  |

13mm Drilling

# **RDX312 Electric Screwdriver** HII Watt RODEX » 4 M Cable » 9.6 Nm torque capacity makes it easy for tasks that require power » Belt Hanger » Speed Adjust » Left-Right Rotation » Lock Switch » Rubber coating with easy grip does not tire hands

|            |            | CARL IN THE PARTY OF |
|------------|------------|----------------------|
| Power      | 600 W      |                      |
| Torque     | 9,6 NM     |                      |
| Screw      | 6 MM       |                      |
| Speed      | 0-4500 RPM |                      |
| Net Weight | 5,2 Kg     |                      |
| Pcs        | 4          |                      |

## **RDX6830 Core Drilling Machines**



2450 Watt super powerful engine operates lots of difficult drilling works easily thanks to its powerful engine. 2 Manual speed adjustment.

Water support for making drilling easier.


The base is made of aluminum alloy, the steel column can be tilted up to 45°, and the engine mount is fixed on a saddle that slides on a Teflon guide that guarantees high performance.

Easy carriage with wheel system.

| Power                  | 2450 W        |
|------------------------|---------------|
| Max. Drilling Capacity | 255 MM        |
| Drilling Depth         | 690 MM        |
| Speed                  | 500 - 920 RPM |
| Net Weight             | 39 Kg         |
| Pcs                    | 1             |

# **RDX6825**



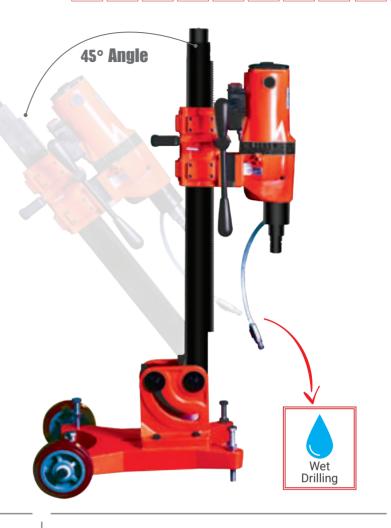

TP 🎸 🍠 🎿



127 MM

152 MM

RDY68127

RDY68152

| RQD | EX |
|-----|----|
|-----|----|

500 MM

500 MM

4



rodexpower.com (f) (b) /rodextools




# **RDX108**

**Angle Grinder** 



» Spindle Lock for easy disc change

- » Protected Switch
- » Two Position Auxiliary Handle
- » Soft handle reduces vibration



Cutting Disc for Metal **included** 

| Voltage 230 V            |
|--------------------------|
| -                        |
| Frequency 50 Hz          |
| Disc Diameter 115/125 MM |
| Speed 11000 RPM          |
| Net Weight 2,4 Kg        |
| Pcs 10                   |

# **RDX105 Angle Grinder**



- » Electronic Speed Adjustment
- » Spindle Lock for easy disc change
- » Protected Switch
- » Easy Brush Change
- » Three Position Auxiliary Handle
- » Soft handle reduces vibration
- » Tool-free Guard Adjustment

| Power         | 1200 W         |
|---------------|----------------|
| Voltage       | 230 V          |
| Frequency     | 50 Hz          |
| Disc Diameter | 115/125 MM     |
| Speed         | 4500-10000 RPM |
| Net Weight    | 3,41 Kg        |
| Pcs           | 6              |

# **RDX109**

**Angle Grinder** 



TTP¥€

- » Spindle Lock for easy disc change » Protected Switch
- » Two Position Auxiliary Handle
- » Soft handle reduces vibration



| Power         | 1020 W     |  |
|---------------|------------|--|
| Voltage       | 230 V      |  |
| Frequency     | 50 Hz      |  |
| Disc Diameter | 115/125 MM |  |
| Speed         | 11000 RPM  |  |
| Net Weight    | 1,9 Kg     |  |
| Pcs           | 10         |  |
|               |            |  |

## **RDX1120 Angle Grinder**



# –<u>\*</u>

# **RDX1151**

**Angle Grinder** 



- » Electronic Speed Adjustment » Spindle lock for easy disc change
- » Protected Switch
- » Soft Starter System

Pcs

- » Easy Brush Change
- » Two Position Auxiliary Handle
- » Soft handle reduces vibration
- » To

| » Tool-free Guard Adjustment |             |
|------------------------------|-------------|
| Power                        | 1200 W      |
| Voltage                      | 230 V       |
| Frequency                    | 50 Hz       |
| Disc Diameter                | 150 MM      |
| Speed                        | 0-10000 RPM |
| Net Weight                   | 2,75 Kg     |
|                              |             |

8

# **RDX1161 Angle Grinder**



» Fast cutting with 1300 watt powerful engine

- » Electronic Speed Adjustment
- » Spindle lock for easy disc change
- » Protected Switch
- » Soft Starter System » Easy Brush Change
- » Two Position Auxiliary Handle
- » Soft handle reduces vibration » Tool-free Guard Adjustment



ANTI VIBRATION TECHNOLOGY

| Power         | 1300 W     |
|---------------|------------|
| Voltage       | 230 V      |
| Frequency     | 50 Hz      |
| Disc Diameter | 180 MM     |
| Speed         | 0-8000 RPM |
| Net Weight    | 3,5 Kg     |
| Pcs           | 8          |

# **RDX1170**

**Angle Grinder** 



- » Fast cutting with 1500 watt powerful engine
- » Electronic Speed Adjustment » Spindle lock for easy disc change
- » Protected Switch
- » Soft Starter System
- » Easy Brush Change
- » Three Position Auxiliary Handle




ANTI VIBRATION

| Power         | 1500 W        |
|---------------|---------------|
| Voltage       | 230 V         |
| Frequency     | 50 Hz         |
| Disc Diameter | 125-150 MM    |
| Speed         | 1000-9000 RPM |
| Net Weight    | 3,6 Kg        |
| Pcs           | 6             |
|               |               |

# **RDX1171 Angle Grinder**



- » Fast cutting with 1500 watt powerful engine
- » Electronic Speed Adjustment » Spindle lock for easy disc change
- » Protected Switch
- » Soft Starter System
- » Easy Brush Change
- » Two Position Auxiliary Handle
- » Soft handle reduces vibration
- » Tool-free Guard Adjustment



# **RDX118**

**Angle Grinder** 



» Fast cutting with 2000 watt powerful engine

- » Spindle lock for easy disc change
- » Protected Switch
- » Soft Starter System
- » Easy Brush Change
   » Three Position Auxiliary Handle
- » Soft handle reduces vibration
- » Tool-free Guard Adjustment

| Power         | 2000 W   |
|---------------|----------|
| Voltage       | 230 V    |
| Frequency     | 50 Hz    |
| Disc Diameter | 180 mm   |
| Speed         | 8000 RPM |
| Net Weight    | 5,5 Kg   |
| Pcs           | 2        |

## **RDX1290 Angle Grinder**



- » Fast cutting with 2400 watt powerful engine
- » Spindle lock for easy disc change
- » Protected Switch
   » Soft Starter System
- » Easy Brush Change
- » Three Position Auxiliary Handle » Soft handle reduces vibration
- » Tool-free Guard Adjustment

| Power         | 2400 W   |
|---------------|----------|
| Voltage       | 230 V    |
| Frequency     | 50 Hz    |
| Disc Diameter | 230 mm   |
| Speed         | 6500 RPM |
| Net Weight    | 6 Kg     |
| Pcs           | 2        |
|               |          |

ANTI VIBRATION

# **RDX1231**

**Angle Grinder** 



----

- » Fast cutting with 2000 watt powerful engine
- » Spindle lock for easy disc change
- » Protected Switch » Soft Starter System
- » Easy Brush Change » Three Position Auxiliary Handle
- » Soft handle reduces vibration
- » Tool-free Guard Adjustment
- Power 2000 W Voltage 230 V Frequency 50 Hz Disc Diameter 230 mm Speed 6500 RPM Net Weight 6 Kg Pcs 2

ANTI VIBRATIO

# **RDX1300 Angle Grinder**



- » Fast cutting with 2600watt powerful engine
- » Spindle lock for easy disc change
- » Protected Switch
   » Soft Starter System
- » Easy Brush Change
- » Three Position Auxiliary Handle
- » Soft handle reduces vibration
- » Tool-free Guard Adjustment

| Power         | 2600 W   |
|---------------|----------|
| Voltage       | 230 V    |
| Frequency     | 50 Hz    |
| Disc Diameter | 230 mm   |
| Speed         | 6500 RPM |
| Net Weight    | 6,5 Kg   |
| Pcs           | 2        |







» Variable speed dial is easy to use. The Variable Speed Adjustment 5 Step Speeds from 10,000 to 32,000 RPM » Spindle lock for fast tool changes.

» Flexible Shaft.

19 🎸 🍠 🍠 🗮 😹

» Perfect for sanding, polishing, cutting, shaping, drilling, deburring, grinding, cleaning, engraving, trimming etc, and enabling you to achieve different crafting work efficiently.

| Power             | 135 W             |
|-------------------|-------------------|
| Clamping Diameter | 0.8 - 3.2 mm      |
| Speed             | 10000 - 32000 RPM |
| Net Weight        | 1,80 Kg           |
| Pcs               | 10                |

Connected to the table telescopic hanger apparatus



**RDX147** Polisher

1200 Watt







» 5 Variable speed regulation, can be adjusted to meet different needs.

Watch it on YouTube

In the second second

- » Spindle lock for easy pad change
- » Soft Starter System
- » Easy Brush Change
- Three Position Auxiliary Handle
   The design of M14 thread is convenient to install the self adhesive disc.

| Power         | 1200 W         |
|---------------|----------------|
| Disc Diameter | 180 mm         |
| Speed         | 600 - 3700 RPM |
| Net Weight    | 3,96 Kg        |
| Pcs           | 6              |



» 5 Variable speed regulation,

- can be adjusted to meet different needs.
- » Soft Starter System
- » Easy Brush Change
- » Two Position Auxiliary Handle
- » The design of M14 thread is convenient to install the self adhesive disc.

RODEX

| Power         | 1200 W         |
|---------------|----------------|
| Disc Diameter | 180 m          |
| Speed         | 600 - 2000 RPM |
| Net Weight    | 2,6 Kg         |
| Pcs           | 8              |
|               |                |

RODEX

www.**rodexpower**.com

wer.com



- » 2400 Watt, 3,800 RPM motor with replaceable brushes provides power and durability for the chop saw.
- » Quick-release material clamp of the metal chop saw allows for easy material cutting and removal.
- » Cutting fence with miter adjustment of the metal cutting saw allows up to 45 degree angles to be cut.
- » Ergonomically designed horizontal handle puts user's wrist in a more comfortable position to help reduce user fatigue and increase productivity
- » Spark deflector provides safety and clear line of sight for cutting.
- » Heavy duty steel base provides stability while cutting.
- » Spindle lock for easy blade changes.





# 7 17 7 7 8 🗐 🛋 🚟 🗻

# **RDX4121A**

**Bench Grinder** 



- » High Motor Power
- » Eye shields for safety
- » Adjustable work/tool rest for precision control
- » Low vibration during operation

| Power      | 180 W          |
|------------|----------------|
| Stone Size | 125x16x12,7 mm |
| Speed      | 2950 RPM       |
| Net Weight | 4 Kg           |
| Pcs        | 1              |

## RDX4171A Bench Grinder



» High Motor Power

- » Eye shields for safety
- » Adjustable work/tool rest for precision control

**RQDEX** 

» Low vibration during operation

| Power      | 375 W          |
|------------|----------------|
| Stone Size | 175x20x12.7 mm |
| Speed      | 2950 RPM       |
| Net Weight | 7,5 Kg         |
| Pcs        | 1              |

# **RDX4151A**

## **Bench Grinder**



<u>\_\_\_\_</u>



» Eye shields for safety

» Adjustable work/tool rest for precision control

» Low vibration during operation

| Power      | 180 W          |
|------------|----------------|
| Stone Size | 150x16x12.7 mm |
| Speed      | 2950 RPM       |
| Net Weight | 6 Kg           |
| Pcs        | 1              |

# RDX4201A Bench Grinder



» High Motor Power

» Eye shields for safety

» Adjustable work/tool rest for precision control

» Low vibration during operation

| Power      | 400 W        |
|------------|--------------|
| Stone Size | 200x20x16 mm |
| Speed      | 2950 RPM     |
| Net Weight | 10 Kg        |
| Pcs        | 1            |

www.**rodexpower**.com

**RDX4201 Bench Grinder** 



» Eve shields for safety

Power

Speed

Pcs

Stone Size

Net Weight

» Low vibration during operation

» EQUIPPED WITH WORK LIGHT » Copper coil to run fast, robust and powerful engine

» Adjustable work/tool rest for precision control

350 W

150x20x16 mm

2950 RPM

11,5 Kg

1





19 🌮 🏈 🍠 🗮 🚄





rodexpower.com (f) (b) (rodextools



TP 💉 🍠 鱦

Les

# **RDX6291**



| Voltage       | 230 V             |
|---------------|-------------------|
| Frequency     | 50 HZ             |
| Disc Diameter | 210 x 30 x 2,8 MM |
| Speed         | 4500 RPM          |
| Net Weight    | 9 Kg              |
| Pcs           | 1                 |

 » Features a powerful 1200 W hi-torque gearbox, which reduces motor stresses improving performance and durability
 » Optimised to cut mild steel, non-ferrous metals, wood and plastic with one blade

» High-quality milled angle scale for precise angled cuts

» Precise parallel guide for maximum cutting accuracy

» Spindle lock for easy saw blade changes

( TR-12) 🖉 🧍

Î



» Our table saw for woodworking works with 5000 rpm to give you the necessary force to cut almost any hardwood. Includes a heavy duty metal table for the necessary balance and stability.
 » This table saw has a rack and pinion bevel control that allows you to make angled cuts from 90° to 45°. Includes a bevel lock lever and handwheel for height adjustment.

- » Quick-release blade guard & riving knife
- » Quick blade elevation adjustment

| Power              | 2000 W    |
|--------------------|-----------|
| Saw Diameter       | 250 mm    |
| Depth of Cut 45°   | 65 mm     |
| Depth of Cut 90°   | 85 mm     |
| Working table size | 583x563mm |
| Speed              | 5000 RPM  |
| Net Weight         | 22 Kg     |
| Pcs                | 1         |



TT TP 🞸 🔗 🍠 🗮 😹



### » LASER GUIDE FOR STRAIGHT CUT

- » 1300W High Performance motor delivers full-size performance at 4700RPM
- » Easy to change the blade with plus hex wrench.
- » Double Safety Switch prevents the machine from accidentally opening
- » 45° Angle Cutting
- » Easy Brush Change

| , ,          |         |
|--------------|---------|
| Power        | 1300 W  |
| Saw Diameter | 185 mm  |
| Depth of Cut | 63mm    |
| Speed        | 4700RPM |
| Net Weight   | 4,5 Kg  |
| Pcs          | 4       |
|              |         |

# **RDX385**

### **Circular Saw**



### » LASER GUIDE FOR STRAIGHT CUT

- » 1800W High Performance motor delivers full-size performance at 5300RPM
- » Easy to change the blade with plus hex wrench.
- » Double Safety Switch prevents the machine from accidentally opening
- » 45° Angle Cutting
- » Easy Brush Change

| , 3          |          |
|--------------|----------|
| Power        | 1800 W   |
| Saw Diameter | 210 MM   |
| Depth of Cut | 75 MM    |
| Speed        | 5300 RPM |
| Net Weight   | 6,25 Kg  |
| Pcs          | 2        |
|              |          |



### » LASER GUIDE FOR STRAIGHT CUT

- » 1600W High Performance motor delivers full-size performance at 5000RPM
- » Easy to change the blade with plus hex wrench.
- » Double Safety Switch prevents the machine from accidentally opening
- » 45° Angle Cutting
- » Easy Brush Change

| Power        | 1600 W   |
|--------------|----------|
| Saw Diameter | 190 MM   |
| Depth of Cut | 65 MM    |
| Speed        | 5000 RPM |
| Net Weight   | 5,5 Kg   |
| Pcs          | 2        |
|              |          |




### » LASER GUIDE FOR STRAIGHT CUT

- » 6 speeds can be applied to different materials: metal, platic, wood and etc.
- » 800-3000 RPM per minute for higher cutting performance
- » 4 Orbital Settings & 45° Bevel Precise Cutting
- » Tool-free Blade Changing & Switch Lock Design
- » LED Light Guide & Dust Collection

| Power        | 850 W          |
|--------------|----------------|
| Depth of Cut | 100 MM         |
| Speed        | 800 - 3000 RPM |
| Net Weight   | 2,25 Kg        |
| Pcs          | 8              |

RODEX

### **RDX9071 Reciprocating Saw**





- » RODEX 710W reciprocating saw with rotation speed between
- 0 ~ 2800 rpm meet different cutting needs on various materials
- » The lock button on the handle helps work through a constant speed
- » With guick-change mechanism, it is able to install or remove the blade
- very quickly and without using any other tool
- » Ideal for cutting of wood, metal, PVC, tube a plasterboard plate etc

| '10 W     |
|-----------|
| 0 MM      |
| 15 MM     |
| 15 MM     |
| -2800 RPM |
| .,58 Kg   |
| i         |
|           |



YTH90628-1 Spare Blade RODEX

<u>\_\_\_\_</u>



### **RDX139** Wall Chaser

1100 Watt 🖇



» 2000 RPM High Power » 16-25-35MM Cutting Depth » Dust Exit Unit » Carry Case



| Power         | 1100 W          |
|---------------|-----------------|
| Cutting Width | 16-35 MM        |
| Depth of Cut  | 16 - 25 - 35 MM |
| Speed         | 2000 RPM        |
| Net Weight    | 10,8 Kg         |
| Pcs           | 2               |

### **RDX3881 Marble Cutter**

19 19 y I I 🗐 🛲



- » 45° Angle Cutting
- » Wet Cutting
- » Easy access to brushes for quick replacement
- » Trigger Lock System

| Power        | 1300 W                       |
|--------------|------------------------------|
| Saw Diameter | 110-125 mm                   |
| Depth of Cut | 90°: 32.5 mm<br>45°: 21.5 mm |
| Speed        | 11000 RPM                    |
| Net Weight   | 3,33 Kg                      |
| Pcs          | 6                            |



# – T T T Š Š 🗐 🛲

# **RDX3901**

**Electric Planer** 



» Large knife shaft and a 910 W power rating deliver » Large knile shart and a 910 w power rating deliv optimum planing results.
 » Adjustable chipping depth. Depth up to 3,5 mm.
 » Large blade wave for ideal working results

» Sturdy, flat aluminium base plate for the best planning results



| Power        | 910W      |
|--------------|-----------|
| Planer Width | 82 mm     |
| Planer Depth | 3,5 mm    |
| Speed        | 16500 RPM |
| Net Weight   | 3,8 Kg    |
| Pcs          | 4         |

### **RDX370 Finishing Sander**



» Speed selection to suit any application

» Velcro-type fastening for fast paper change

**RQDEX** 

- » Soft-grip design for comfortable working

- » Sorregnp design for c
   » AluminiumBase
   » Trigger Lock System
   » Dust Collection Bag

| Power        | 300 W            |
|--------------|------------------|
| Sanding Size | 115 x 230 MM     |
| Speed        | 6000 - 12000 RPM |
| Net Weight   | 2,5 Kg           |
| Pcs          | 6                |

# **RDX374**

**Belt Sander** 



- » Under the 1000W high power and 6 adjustable speeds
- > Officer the following power and calculations sp.
   > 75 x 533mm sandpaper for larger sanding area
   > Soft-grip design for comfortable working
   > Adjustable Handle
   > Trigger Lock System, perfect for long-time work.

- » Speed Adjust

| 2            |               |
|--------------|---------------|
| Power        | 1010 W        |
| Sanding Size | 76 x 533 MM   |
| Speed        | 120 - 380 RPM |
| Net Weight   | 4,11 Kg       |
| Pcs          | 6             |

### **RDX376 Random Orbit Sander**



» Speed selection to suit any application

- » Velcro-type fastening for fast paper change
   » Soft-grip design for comfortable working
- » Trigger Lock System
   » Dust Collection Bag

| Power        | 430 W          |
|--------------|----------------|
| Sanding Size | 125 MM         |
| Speed        | 6000-13000 RPM |
| Net Weight   | 2,5 Kg         |
| Pcs          | 6              |

### **RDX377 Random Orbit Sander**

450 Watt 4

» Excellent, handling, control and manageability for relaxed and clean working in all orientations
 » Variable speed control with ergonomic positioning
 » Velcro-type fastening for fast paper change
 » Soft-grip design for comfortable working

- » Trigger Lock System
- » Integrated dust extraction due to the dust box

| Power        | 450 W          |
|--------------|----------------|
| Sanding Size | 125 / 150 MM   |
| Speed        | 4000-13000 RPM |
| Net Weight   | 2,84 Kg        |
| Pcs          | 5              |

### **RDX3785 Electric Trimmer**





| Power          | 680 W    |
|----------------|----------|
| Chuck Diameter | 6,35 MM  |
| Spindle Lock   | Yes      |
| Speed          | 3000 RPM |
| Net Weight     | 1,8 Kg   |
| Pcs            | 10       |



# **RDX3787**

**Electric Router** 



. Yezhoù

» 1600W motor with soft start function and variable speeds (6000-22000rpm) for smooth

routing across every application

- Variable plunge depth up to 50mm with micro adjustment dial for precise woodwork
   ½ inch and ¼ collets enable use with the most widely available router bits
   Ergonomic soft grip handle with on/off lock-on switch built-in for maximum ease of use

| Power        | 1600 W           |
|--------------|------------------|
| Clamp Size   | 8 / 12 MM        |
| Plunge Depth | 0-60 MM          |
| Speed        | 6000 - 22000 RPM |
| Net Weight   | 5,48 Kg          |
| Pcs          | 2                |









| RDX392<br>Hand Mixer | 1                                                                                               |                          | RDX3941<br>Hand Mixer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------|-------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1200 Watt            | nic design, soft grip.<br>n, Tool connection: <b>M14</b><br>1 feed, paint, cement, drywall mud, | Mixer Paddle<br>Included | <ul> <li>bedau Watt</li> <li>bedau Watt</li></ul> |
| Power                | 1200 W                                                                                          |                          | Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Mixer Paddle         | Ø 120 mm                                                                                        | r I                      | Mixer Paddle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Speed                | 0 - 800 RPM                                                                                     |                          | Speed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Net Weight           | 5,25 Kg                                                                                         |                          | Net Weight                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Pcs                  | 2                                                                                               | P                        | Pcs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                      |                                                                                                 |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

# RDX705 Electric Paint Spray Gun



# • O VARIABLE SPEED MODES • Double handle ergononic design, soft grip. • Mixer Paddle Ø140 mm, Tool connection: M14 • Widely used for mixing feed, paint, cement, drywall mud, grout, mortar, plaster etc. • Trigger Lock Syste • Easy Brush Change m Power 1600 W Mixer Paddle Ø 140 mm Speed 0 - 800 RPM Net Weight 6 Kg



| Vibrator Type       | Deep        |
|---------------------|-------------|
| Engine Type         | Electric    |
| Power               | 1500 W      |
| Vibration Frequency | 2850 R/Min. |
| Tip Diameter        | 50-70 MM    |
| Net Weight          | 10,8 Kg     |
| Pcs                 | 1           |

### RDX470 Concrete Vibrator



| Vibrator Type       | Deep        |
|---------------------|-------------|
| Engine Type         | Electric    |
| Power               | 800 W       |
| Vibration Frequency | 3800 R/Min. |
| Tip Diameter        | 35 MM       |
| Net Weight          | 1,80 Kg     |
| Pcs                 | 10          |

# **RDX476**

**Concrete Vibrator** 



| Vibrator Type       | Deep        |
|---------------------|-------------|
| Engine Type         | Electric    |
| Power               | 2000 W      |
| Vibration Frequency | 2850 R/Min. |
| Tip Diameter        | 50-70 MM    |
| Net Weight          | 10 Kg       |
| Pcs                 | 1           |

### **Concrete Vibrator Shaft**



| Code   | Vibrator Mace<br>Diameter | Shaft<br>Length | Pcs./Box |
|--------|---------------------------|-----------------|----------|
| RDY170 | 35 MM                     | 1 M             | 1        |
| RDY171 | 35 MM                     | 1,5 M           | 1        |
| RDY172 | 35 MM                     | 2 M             | 1        |
| RDY175 | 50 MM                     | 4 M             | 1        |
| RDY176 | 50 MM                     | 6 M             | 1        |
| RDY177 | 70 MM                     | 4 M             | 1        |
| RDY178 | 70 MM                     | 6 M             | 1        |



R

🎲 🏈 🍠 🖽 🖽 💉

\_`ed



| Power         | 1400 W  |
|---------------|---------|
| Power Outlet  | 1800 W  |
| Tank Capacity | 20 L    |
| Vacuity       | ≥ 20kpa |
| Net Weight    | 7 Kg    |
| Pcs           | 1       |

17 🗊 🎸 🌍 🚚 🧮

- Yéd

-

# RDX307





| Power         | 1400 W  |
|---------------|---------|
| Power Outlet  | 1800 W  |
| Tank Capacity | 30 L    |
| Vacuity       | ≥ 20kpa |
| Net Weight    | 7 Kg    |
| Pcs           | 1       |


RQDEX



**RDX287** 

### **Industrial Electric Heater**





| Power                    | 5 kW                    |
|--------------------------|-------------------------|
| Voltage                  | 380-400 V               |
| Air Consumption          | 588 m³ / Hour           |
| Temperature              | 0-85 ° C                |
| Thermostat               | Yes                     |
| Heating Method           | Ceramic Heating Element |
| Recommended Heating Area | 50 m²                   |
| Cable Length             | 1.6 M                   |
| Dimensions               | 330*235*345mm           |
| Net Weight               | 4,36 Kg                 |
|                          | 1,6 6 1 kg              |
| Pcs                      | 1                       |

# **RDX286**

**Electric Heater** 



| Power                      | 3 kW                    |
|----------------------------|-------------------------|
| Voltage                    | 220-240 V               |
| Air Consumption            | 280 m³ / Hour           |
| Temperature                | 0-85 ° C                |
| Thermostat                 | Yes                     |
| Heating Method             | Ceramic Heating Element |
| Recommended Heating Area   |                         |
| Recommended Heating Area   | 30 m <sup>2</sup>       |
| Cable Length               | 30 m²<br>1.6 M          |
| 5                          |                         |
| Cable Length               | 1.6 M                   |
| Cable Length<br>Dimensions | 1.6 M<br>265*210*290mm  |



13 12 X I

4

• The ceramic heater does not burn out oxygen in the room. The room does not get stuffy when using the heater.

- Does not ignite dust that has fallen on it. There is no unpleasant burnt smell during heating.
- The air flow direction is regulated by the fan inclination. No additional tools are required to change the airflow angle.
- The operating mode and heating intensity are set with rotary knobs from above. The controls are simple and straightforward.

 $\cdot$  3 operating modes: airing, half power and full power. In ventilation mode, replaces the conventional fan.

• The device is to in handy even in the warm season.

# **RDX285**

### **Electric Heater**



| Power                    | 2 kW                    |
|--------------------------|-------------------------|
| Voltage                  | 220-240 V               |
| Air Consumption          | 197 m³ / Hour           |
| Temperature              | 0-85 ° C                |
| Thermostat               | Yes                     |
| Heating Method           | Ceramic Heating Element |
| Recommended Heating Area | 20 m²                   |
| Cable Length             | 1.6 M                   |
| Dimensions               | 210*160*217mm           |
| Net Weight               | 1,88 Kg                 |
| Pcs                      | 8                       |

# **RDX2812**

### **Gas Forced Heater**



- » 320 m³/h. heat up a area in no time.
   » This heater can run on both LPG and Propane gas.
   » Use in workshops and garages and are capable of heating a large room quickly and easily.
- Fan assisted to ensure strong control over heat output
   Automatic overheat protection system
   Built in carry handle for easy portability

| Voltage                     | 220-240 V        |
|-----------------------------|------------------|
| Heating capacity            | 40.000 BTU/H.    |
| Heating power               | 12 kW            |
| Fan Power Consumption       | 40 W             |
| Max flow rate gas           | 0,81 Kg/H.       |
| Add. liquefied pressure gas | 0.7 Bar          |
| Air consumption             | 320 m³/H.        |
| Fuel                        | propane / butane |
| Auto ignition               | Yes              |
| Weight                      | 3.8 Kg           |
| Quantity                    | 1                |
|                             |                  |

# **RDX2833**

### **Gas Forced Heater**



- » 650 m³/h. heat up a area in no time.
   » This heater can run on both LPG and Propane gas.
   » Use in workshops and garages and are capable of heating a large room quickly and easily.
- » Fan assisted to ensure strong control over heat output
- Automatic overheat protection system
   Built in carry handle for easy portability

**RODEX** -

| Voltage                     | 220-240 V        |
|-----------------------------|------------------|
| Heating capacity            | 112.000 BTU/H.   |
| Heating power               | 33 kW            |
| Fan Power Consumption       | 70 W             |
| Max flow rate gas           | 2,4 Kg/H.        |
| Add. liquefied pressure gas | 0.7 Bar          |
| Air consumption             | 650 m³/H.        |
| Fuel                        | propane / butane |
| Auto ignition               | Yes              |
| Weight                      | 5,65 Kg          |
| Quantity                    | 1                |

# **RDX2817**

**Gas Forced Heater** 



- » 320 m³/h. heat up a area in no time.
   » This heater can run on both LPG and Propane gas.
   » Use in workshops and garages and are capable of heating a large room quickly and easily.
- » Fan assisted to ensure strong control over heat output
   » Automatic overheat protection system
   » Built in carry handle for easy portability

| Voltage                     | 220-240 V        |
|-----------------------------|------------------|
| Heating capacity            | 57.000 BTU/H.    |
| Heating power               | 17 kW            |
| Fan Power Consumption       | 40 W             |
| Max flow rate gas           | 1.17 Kg/H.       |
| Add. liquefied pressure gas | 0.7 Bar          |
| Air consumption             | 320 m³/H.        |
| Fuel                        | propane / butane |
| Auto ignition               | Yes              |
| Weight                      | 3.8 Kg           |
| Quantity                    | 1                |
|                             |                  |

# **RDX2851**

### **Gas Forced Heater**



- » 650 m³/h. heat up a area in no time.
  » This heater can run on both LPG and Propane gas.
  » Use in workshops and garages and are capable of heating a large room quickly and easily.
  » Fan assisted to ensure strong control over heat output
  » Automatic overheat protection system
  » Built in carry handle for easy portability

| Voltage                     | 220-240 V        |
|-----------------------------|------------------|
| Heating capacity            | 173.000 BTU/H.   |
| Heating power               | 51 kW            |
| Fan Power Consumption       | 70 W             |
| Max flow rate gas           | 3,7 Kg/H.        |
| Add. liquefied pressure gas | 1,5 Bar          |
| Air consumption             | 650 m³/H.        |
| Fuel                        | propane / butane |
| Auto ignition               | Yes              |
| Weight                      | 6,45 Kg          |
| Quantity                    | 1                |
|                             |                  |

# **RDX2910**

### **Diesel Forced Heater**



### » 750 m<sup>3</sup>/h. heat up a area in no time.

- » Stainless steel combustion chamber with fan cooling,
- Flame sensor Over heat and Cut-off protection
   Automatic electric safety & control device.

| Voltage               | 220-240 V     |
|-----------------------|---------------|
| Heating capacity      | 34.000 BTU/H. |
| Heating power         | 10 kW         |
| Fan Power Consumption | 230 W         |
| Fuel consumption      | 0.8 Kg/H.     |
| Air consumption       | 450 m³/H.     |
| Fuel                  | Diesel        |
| Auto ignition         | Yes           |
| Weight                | 10 Kg         |
| Quantity              | 1             |

## **RDX2930**



# **RDX2920**

**Diesel Forced Heater** 





TTPY 🛠 🗧 🏛 🧮 👞 🛶

- > 750 m³/h. heat up a area in no time.
   > Stainless steel combustion chamber with fan cooling,
   > Flame sensor Over heat and Cut-off protection
   > Temperature display & control.
   > Automatic electric safety & control device.

| Voltage               | 220-240 V     |
|-----------------------|---------------|
| Heating capacity      | 68.000 BTU/H. |
| Heating power         | 20 kW         |
| Fan Power Consumption | 230 W         |
| Fuel consumption      | 1,6 Kg/H.     |
| Air consumption       | 550 m³/H.     |
| Fuel                  | Diesel        |
| Auto ignition         | Yes           |
| Weight                | 14 Kg         |
| Quantity              | 1             |

# **RDX2950**

### **Diesel Forced Heater**



- » Flame sensor Over heat and Cut-off protection

Temperature display & control.

- » Automatic electric safety & control device.
- » Wheels for easy mobility.

| " whiceis for easy mobility. |                |
|------------------------------|----------------|
| Voltage                      | 220-240 V      |
| Heating capacity             | 170.000 BTU/H. |
| Heating power                | 50 kW          |
| Fan Power Consumption        | 230 W          |
| Fuel consumption             | 4,0 Kg/H.      |
| Air consumption              | 1200 m³/H.     |
| Fuel                         | Diesel         |
| Auto ignition                | Yes            |
| Weight                       | 26 Kg          |
| Quantity                     | 1              |
|                              |                |

RQDEX



| -Hot air grade adjustment, enables to work by adjusting |
|---------------------------------------------------------|
| the heated air according to need of the job.            |
| -Ergonomic design, rubber coating with easy grip does   |
| not tiro handa                                          |

not tire hands.

- 4 Nozzles & other accessories

| ACCESSORIES |  |
|-------------|--|
|             |  |


# **RDX302**

Speed

Pcs

Net Weight

**Hot Air Gun** 



250/500 L/min

2,1 Kg

5

» This kind of heat gun is designed with 2 modes

- » Built-in overheating protection can make sure safe and reliable using.
- » 4 Nozzles & other accessories
- » Ergonomic design, rubber coating with easy grip does not tire hands.
  » Carry case

| Power       | 2000 W        |
|-------------|---------------|
| Temperature | 450° / 600°C  |
| Speed       | 250/500 L/min |
| Net Weight  | 1,96 Kg       |
| Pcs         | 5             |
|             |               |

# RDX303 Hot Air Gun



» This kind of heat gun is designed with 2 modes

- » Built-in overheating protection can make sure safe and reliable using.
- » 4 Nozzles & other accessories
- » Ergonomic design, rubber coating with easy grip does not tire hands.
- » Carry case

| Power       | 2000 W        |
|-------------|---------------|
| Temperature | 300° / 600°C  |
| Speed       | 280/480 L/min |
| Net Weight  | 1,94 Kg       |
| Pcs         | 5             |
|             |               |

**RDX304** Hot Air Gun 2000 Watt 🖌 RODEX 650°C 50°C Carry Case -Smart thermostat, automatic shutdown in case of heating because of overstrain. Power -2000W motor can generate powerful hot air and can heat 2000 W ACCESSORIES up in seconds quickly. Temperature -Multifunctional heat gun widely can be applied for peeling 300° / 650°C paint, bending pipes, igniting carbon, shrinking PVC, removing rusted bolts, bending and molding plastics and thawing Speed 300/500 L/min and more Net Weight -Ergonomic design, rubber coating with easy grip does not 1,6 Kg tire hands. Pcs - 4 Nozzles & other accessories 5



» This kind of heat gun is designed with 2 modes

» Built-in overheating protection can make sure safe and reliable using.

» 4 Nozzles & other accessories

» Ergonomic design, rubber coating with easy grip does not tire hands.

| Power       | 2000 W        |
|-------------|---------------|
| Temperature | 300° / 600°C  |
| Speed       | 280/480 L/min |
| Net Weight  | 1,29 Kg       |
| Pcs         | 10            |
|             |               |

RDX3015 Air Blower



# » Professional 650 watt powerful leaf blower, portable and easy to use

» Built-in powerful and durable high speed copper motor

- » Offer different wind forces with variable speeds controller switch
- » Rubber soft grip coated handle
- » Powerful blower and suction device ideal for leaf blowing or car drying

| Power      | 650 W      |
|------------|------------|
| Speed      | 0-1500 RPM |
| Net Weight | 2,16 Kg    |
| Pcs        | 6          |

RQDEX



17 17 🗳 🍠 🍠 🗮 🚄

### RDX480A Electric Chain Hoist


| RODEN                  |               |
|------------------------|---------------|
| Operating Voltage      | 230 V         |
| Frequency              | 50 Hz         |
| Power                  | 1300 W        |
| Load Capacity          | 400 / 800 Kg  |
| Rope length - thicknes | 20 M (Ø 4 mm) |
| Net Weight             | 19,2 Kg       |
| Pcs                    | 2             |

RQDEX

### RDX450A Electric Chain Hoist



### RDX425A Electric Chain Hoist



¶¶‡¢ < € 🚍 🛋





### **RDX425** RODEX Electric **Chain Hoist** 500 Watt **Operating Voltage** 230 V COPPER WINDING MOTOR Frequency 50 Hz Power 500 W 101 Load Capacity 125/250 Kg Rope length - thicknes 20 M (Ø 4 mm) Net Weight 11 Kg Pcs 2

RQDEX



rodexpower.com (f) (a) (b) /rodextools





www.**rodexpower**.com

RODEX battery charger can flexibly set different charging voltage of 12-24V, perfect match all types of batteries to 100% full charge, and provide stronger engine start, including automotive deep cycle 12-24 volt sealed lead-acid AGM, gel, flooded batteries, dead batteries, poor starting power and lost performance batteries.

# **RDX505 - RDX508**

| Battery        | 20-120 Ah | 30-200 Ah |
|----------------|-----------|-----------|
| Output Voltage | 12-24V    | 12-24V    |
| Charging Rate  | 15A       | 30A       |
| Net Weight     | 4,6 KG    | 7,5 KG    |
| Pcs            | 2         | 2         |



¶¶₽¥€ 😹 🗮 💉

<u>\_\_\_\_</u>

# **RDX5115**

### **Inverter DC Welding Machine**



# **RDX5117**

### **Inverter DC Welding Machine**

» Min - Max current 10-180 A

- » Digital indicator
- » Provides non-stop welding performance with
- Ø1,6mm, Ø3,2mm of covered electrodes. » Thermal Protection

| <ul> <li>» Air Cooler</li> <li>» Shoulder Strap</li> <li>» Carry Case</li> </ul> |                |            | RODEX                                |
|----------------------------------------------------------------------------------|----------------|------------|--------------------------------------|
| Operating Voltage                                                                | 230V/50 HZ     | 10-180A 🗲  |                                      |
| Rated Power Input                                                                | 5.4 <b>кw</b>  |            | r in the factor                      |
| Output Current                                                                   | 10-180A        |            |                                      |
| Electrode                                                                        | Ø1.6 - Ø3.2 mm | IGBT       | ACCESSORIES                          |
| Rated Duty Cycle (%)                                                             | 60             | TECHNOLOGY |                                      |
| Insulation Class                                                                 | F              | TECHNOLOGY |                                      |
| Efficiency (%)                                                                   | 85             |            |                                      |
| Net Weight                                                                       | 5 Kg           | IP21S      | ANTI ARC HOT STICK / FORCE / START / |
| Pcs                                                                              | 1              |            |                                      |

Ð

# **RDX5118**

### **Inverter DC Welding Machine**

- » Min Max current 20-200 A
- » Digital indicator
- » Provides non-stop welding performance with
- Ø1,6mm, Ø4,0mm of covered electrodes.
- » Thermal Protection » Air cooler
- » Shoulder Strap

| Operating Voltage    | 230V/50 HZ   | 20-200A 4  |
|----------------------|--------------|------------|
| Rated Power Input    | 6.0 кw       | LO-LUUA    |
| Output Current       | 20-200A      |            |
| Electrode            | Ø1.6 - Ø4 mm | IGBT       |
| Rated Duty Cycle (%) | 60           | TECHNOLOGY |
| Insulation Class     | Н            |            |
| Net Weight           | 4 Kg         | IP21S      |
| Pcs                  | 1            | 11 210     |



¶¶₽¥€≣≦≤\_



RODEX

ANTI Stick ARC FORCE HOT Start

ACCESSORIES

Þ

# **RDX5121**

### **Inverter DC Welding Machine**

- » Min Max current 20-300 A
- » Digital indicator
- » Provides non-stop welding performance with
- Ø1,6mm, Ø5,0mm of covered electrodes.
- » Thermal Protection
- » Air cooler
- » Carry Handle

| Operating Voltage    | 230V/50 HZ  |
|----------------------|-------------|
| Rated Power Input    | 10.5 кw     |
| Output Current       | 20-300 A    |
| Electrode            | Ø1.6 - Ø mm |
| Rated Duty Cycle (%) | 80          |
| Insulation Class     | F           |
| Net Weight           | 6,5 Kg      |
| Pcs                  | 1           |
|                      |             |



20-300A


**IGBT** 

**IP21S** 

19 19 2 3 🔊 🍠 📠 🛒

<u><u></u></u>





Pcs

MIG: 50-250A

MMA: 20-250A

32,1 KG

250

CURREN

DIGITAL

DISPLAY

Ø1.6-Ø4 mm Air cooler

Carry

Handle

1

Ø0.6-Ø1 mm

RQDEX

# **RDX5150**

### **Inverter Plasma Cutting Machine**



# **RDX5155**

### **Inverter Plasma Cutting Machine**

|                           |            |           |                            | 0      |             | ACCESSO      |
|---------------------------|------------|-----------|----------------------------|--------|-------------|--------------|
| 10-40A 🗲                  |            |           |                            | V      | 009. 40     |              |
|                           |            |           |                            |        | ODEX B.D.D. | <b> </b> 6 # |
| Operating Voltage         | 230V/50 HZ |           | Ъ                          | Do.    | - unus      |              |
| Rated Power Input         | 15,2 кw    |           | . <sup>21</sup> 23         | "VDE1- | No. 1       | IP2          |
| Maximum cutting thickness | 8-12 mm    | 14-100A C | Cutting Thicknes<br>8-12mm | ss V   |             | IG           |
| Output Current            | 14-40A     |           | 0-1211111                  |        |             | TECHNO       |
| Rated Duty Cycle (%)      | 60         | 40        | 5                          |        |             |              |
| Insulation Class          | F          |           |                            |        |             | 2            |
| Net Weight                | 11 kg      | DIGITAL   | Air cooler                 | Carry  |             |              |
| Pcs                       | 1          | DISPLAY   |                            | Handle |             |              |
|                           |            |           |                            |        | •           |              |

# **RDX5160**



**RQDEX** 



rodexpower.com (f) (b) /rodextools

RODE

RODEX





- » Copper Tube Blower
- » Transportation Handle
- » Transportation Wheels
- » Dual Output

Power

|     | Don't use without engine oil.<br>Use 10/40 or 20/50 Engine Oil. |
|-----|-----------------------------------------------------------------|
|     |                                                                 |
| 2,0 | ) Hp /1500 W                                                    |
| 24  | Lt                                                              |
| 8 [ | Bar                                                             |

| Tank Capacity | 24 Lt     |
|---------------|-----------|
| Pressure      | 8 Bar     |
| Speed         | 206 L/Min |
| Net Weight    | 25,7 Kg   |
| Pcs           | 1         |

# 

17 💉 🍠 🔎


Low Noise

OII

FREE

# » Transportation Handle » Transportation Wheels » Dual Output Power Tank Capacity

| Power         | 1,5 Hp / 1100 W |
|---------------|-----------------|
| Tank Capacity | 50 Lt           |
| Pressure      | 8 Bar           |
| Speed         | 200 L/Min       |
| Net Weight    | 34,6 Kg         |
| Pcs           | 1               |

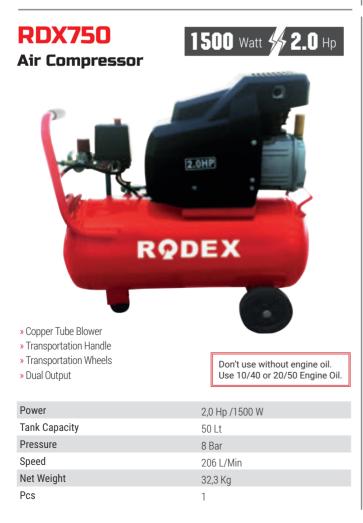




### » Copper Winding engine for fast operations and long life

| <ul> <li>» Copper Tube Blower</li> <li>» Transportation Handle</li> <li>» Transportation Wheels</li> <li>» Dual Output</li> </ul> | Don't use without engine oil.<br>Use 10/40 or 20/50 Engine Oil. |  |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|--|
| Power                                                                                                                             | 2,0 Hp /1500 W                                                  |  |
| Tank Capacity                                                                                                                     | 100 Lt                                                          |  |
| Pressure                                                                                                                          | 8 Bar                                                           |  |
| Speed                                                                                                                             | 250 L/Min                                                       |  |
| Net Weight                                                                                                                        | 79 Kg                                                           |  |
| Pcs                                                                                                                               | 1                                                               |  |

19 🏈 🍠 🏛 🚍 🚁

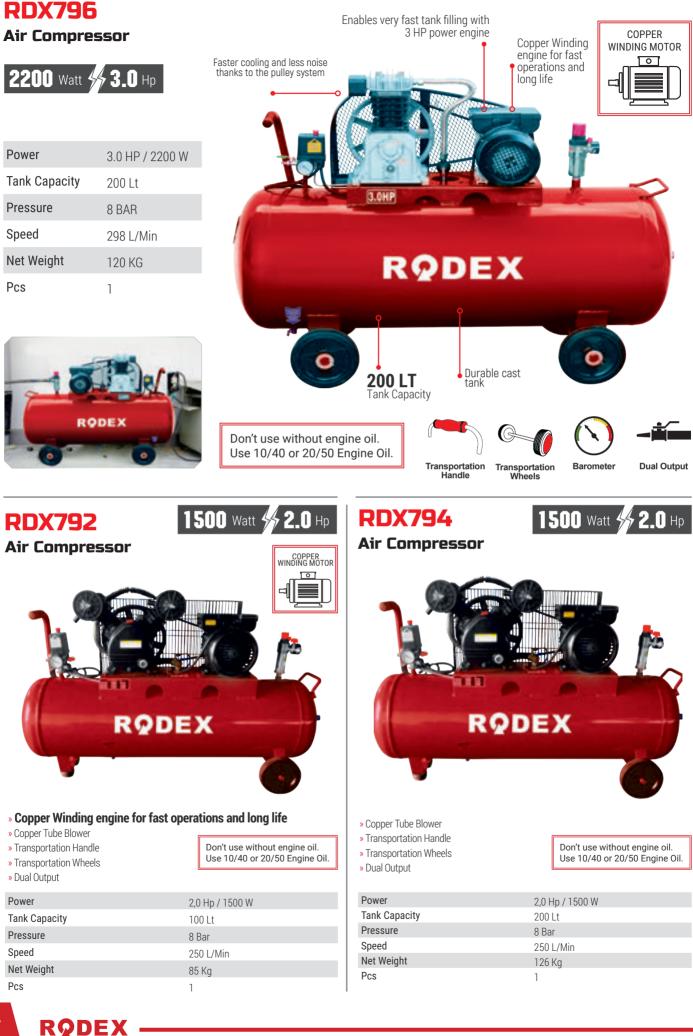

| 7 | 13 |  | 5 |  |  |
|---|----|--|---|--|--|
|   |    |  |   |  |  |

|   | RDX012                         | Air Impact Wrench |
|---|--------------------------------|-------------------|
| ( | SOCKETS<br>included Carry Case | and a             |
|   | Hammer System                  | One Hammer        |
|   | Length                         | 180 MM            |
|   | Bolt Capacity                  | 16 MM             |
|   | Square Drive                   | 1/2"              |
|   | Maximum Torque                 | 312 NM            |
|   | Speed                          | 7000 RPM          |
|   | Hose Diameter                  | 10 M              |
|   | Air Inlet                      | 1/4"              |
|   | Air Consumption                | 120 L/min         |
|   | Work Pressure                  | 90 psi (6.2 atm)  |
|   | Net Weight                     | 4,1 KG            |
|   | Pcs                            | 5                 |

# RDX0135 Air Nailer Gun



# RDX0116 Air Stapler Gun



| Magazine Capacity         140 Pcs           Air Inlet         1/4"           Pressure         3,5-5 BAR           Net Weight         1.3 KG | Staple Capacity   | 6-16 MM   |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------|
| Pressure 3,5-5 BAR                                                                                                                          | Magazine Capacity | 140 Pcs   |
| 0,000,01                                                                                                                                    | Air Inlet         | 1/4"      |
| Net Weight 1.3 KG                                                                                                                           | Pressure          | 3,5-5 BAR |
|                                                                                                                                             | Net Weight        | 1,3 KG    |
| <b>Pcs</b> 10                                                                                                                               | Pcs               | 10        |



## **RDX0128**

Net Weight

Pcs

### Air Nail & Stapler Gun

1,5 KG

10

Carry Case



| Nail Capacity     | 10-25 MM  |
|-------------------|-----------|
| Magazine Capacity | 100 Pcs   |
| Air Inlet         | 1/4"      |
| Pressure          | 3,5-7 BAR |
| Net Weight        | 1,3 KG    |
| Pcs               | 10        |

# RDX0120 Air Stapler Gun



# **\*\*\***

# **RDX92000E**

### **Gasoline Generators**



| Maximum Power    | 2.7 KVA / 2.2 KW                      |
|------------------|---------------------------------------|
| Continuous Power | 2.5 KVA / 2.0 KW                      |
| Voltage          | 220 W                                 |
| Power Factor     | 1 (COS Ø)                             |
| Engine           | Single Cylinder, Air Cooled, 4 Stroke |
| Engine Type      | 170F                                  |
| Starting System  | Recoil / Electric Starter             |
| Fuel Type        | Unleaded Gasoline                     |
| Fuel Tank        | 15 Lt                                 |
| Fuel Consumption | 1.13Lt/H                              |
| Engine Oil       | 20/50 - Sae30                         |
| Sound Level      | 66 dB                                 |
| N.W / G.W        | 41.16 / 43.44 KG                      |
|                  |                                       |

# **RDX92800E**

### **Gasoline Generators**



| Maximum Power    | 3,7 KVA / 3 KW                        |
|------------------|---------------------------------------|
| Continuous Power | 3.5 KVA / 2.8 KW                      |
| Voltage          | 220 W                                 |
| Power Factor     | 0,8 (COS Ø)                           |
| Engine           | Single Cylinder, Air Cooled, 4 Stroke |
| Engine Type      | 170F                                  |
| Starting System  | Recoil / Electric Starter             |
| Fuel Type        | Unleaded Gasoline                     |
| Fuel Tank        | 15 Lt                                 |
| Fuel Consumption | 1.13Lt/H                              |
| Engine Oil       | 20/50 - Sae30                         |
| Sound Level      | 76 dB                                 |
| N.W / G.W        | 45.2/ 47.5 KG                         |

**RQDEX** -

# **RDX92000R**

**Gasoline Generators** 



| Maximum Power    | 2.7 KVA / 2.2 KW                      |
|------------------|---------------------------------------|
| Continuous Power | 2.5 KVA / 2.0 KW                      |
| Voltage          | 220 W                                 |
| Power Factor     | 1 (COS Ø)                             |
| Engine           | Single Cylinder, Air Cooled, 4 Stroke |
| Engine Type      | 170F                                  |
| Starting System  | Recoil                                |
| Fuel Type        | Unleaded Gasoline                     |
| Fuel Tank        | 15 Lt                                 |
| Fuel Consumption | 1.13Lt/H                              |
| Engine Oil       | 20/50 - Sae30                         |
| Sound Level      | 66 dB                                 |
| N.W / G.W        | 37 / 35 KG                            |
|                  |                                       |


# **RDX92800R**

### **Gasoline Generators**



| Maximum Power    | 3,7 KVA / 3 KW                        |
|------------------|---------------------------------------|
| Continuous Power | 3.5 KVA / 2.8 KW                      |
| Voltage          | 220 W                                 |
| Power Factor     | 0,8 (COS Ø)                           |
| Engine           | Single Cylinder, Air Cooled, 4 Stroke |
| Engine Type      | 170F                                  |
| Starting System  | Recoil                                |
| Fuel Type        | Unleaded Gasoline                     |
| Fuel Tank        | 15 Lt                                 |
| Fuel Consumption | 1.13Lt/H                              |
| Engine Oil       | 20/50 - Sae30                         |
| Sound Level      | 76 dB                                 |
| N.W / G.W        | 38.5/40.8 KG                          |

–<u>\*</u> 🛪 🔊 🍠 🛲 🛲 🛶

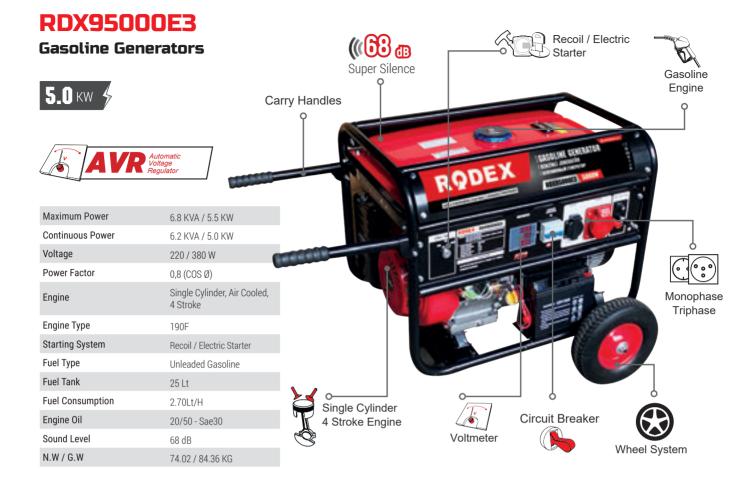

# **RDX95000E**

**Gasoline Generators** 



Monophase


Maximum Power 6.8 KVA / 5.5 KW **Continuous Power** 6.2 KVA / 5.0 KW Voltage 220 W Power Factor 0,8 (COS Ø) Engine Single Cylinder, Air Cooled, 4 Stroke Engine Type 100F Starting System Recoil / Electric Starter Fuel Type Unleaded Gasoline Fuel Tank 25 Lt Fuel Consumption 2.70Lt/H Engine Oil 20/50 - Sae30 Sound Level 68 dB N.W / G.W 73.84 / 84.08 KG

# **RDX96000E**



Maximum Power 8.1 KVA / 6.5 KW **Continuous Power** 7.5 KVA / 6.0 KW Voltage 220 W Power Factor 1 (COS Ø) Engine Single Cylinder, Air Cooled, 4 Stroke Engine Type 100F Starting System Recoil / Electric Starter Fuel Type Unleaded Gasoline Fuel Tank 25 Lt **Fuel Consumption** 2.70Lt/H Engine Oil 20/50 - Sae30 Sound Level 68 dB N.W / G.W 75.56 / 85.56 KG

–¶¶¶¥€ Li 🗒 🗻 —

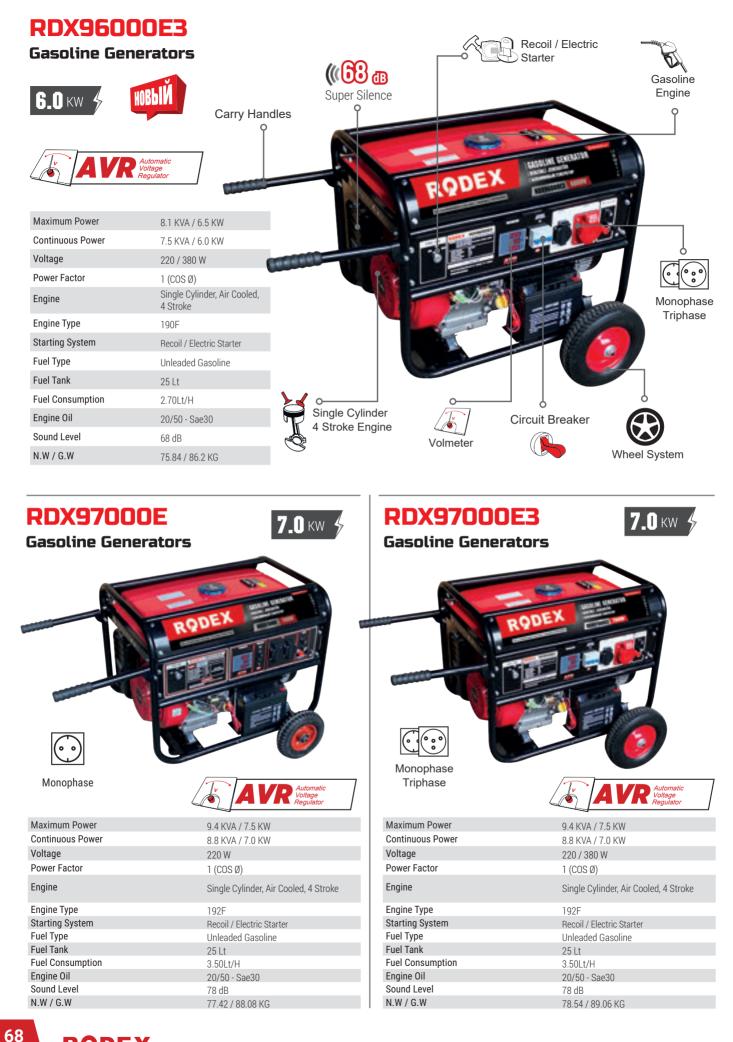



# **RDX96500DE3**

**Diesel Generator** 

| 6,5 kw                                                                   | 7  |
|--------------------------------------------------------------------------|----|
| Maximum Power 8.1 KVA / 6.5 KW                                           | J  |
| Continuous Power 7.5 KVA / 6.0 KW                                        |    |
| Voltage         220 / 380 W                                              | Ľ. |
| Power Factor 0.8 (COS Ø)                                                 |    |
| Engine Single Cylinder, Air Cooled, 4 Stroke, Direct<br>Injection Diesel | l  |
| Engine Type 192FD                                                        |    |
| Starting System Recoil / Electric Starter                                |    |
| Fuel Type Euro Diesel                                                    |    |
| Fuel Tank 13.5 Lt                                                        |    |
| Fuel Consumption 2.5 Lt/H                                                |    |
| Engine Oil SAE 10W-30,15W-40                                             |    |
| Sound Level 77 dB                                                        |    |
| N.W / G.W 115/120 KG                                                     |    |



Portable Cover

P

12

### **RDX135E Diesel Tillers**

10,0Hp 🔸

| Engine Type      | Single Cylinder, Air Cooled,<br>4 Stroke, Direct Injection Diesel | <b>D</b> . 11        |
|------------------|-------------------------------------------------------------------|----------------------|
| Engine Power     | 10 Hp                                                             | Portable<br><b>P</b> |
| Starting System  | Recoil-Electric Starter                                           |                      |
| Operation Type   | Gear Transmission                                                 |                      |
| Movement Type    | 2 Forward - 1 Backward                                            |                      |
| Fuel Type        | Euro Diesel                                                       |                      |
| Engine Oil       | 20/50-Sae30                                                       |                      |
| Fuel Tank        | 5 L                                                               |                      |
| Working Depth    | 30 CM                                                             | 6                    |
| Working Width    | 80-130 CM                                                         |                      |
| Amount of Blades | 40 Pcs                                                            | Lighting             |
| Rubber Wheel     | 500-12                                                            | Lighting<br>System   |
| Net Weight       | 209,5 KG                                                          |                      |




# **RDX105E Diesel Tillers**



| Engine Type      | Single Cylinder, Air Cooled,<br>4 Stroke, Direct Injection Diesel |
|------------------|-------------------------------------------------------------------|
| Engine Power     | 7 Нр                                                              |
| Starting System  | Recoil-Electric Starter                                           |
| Operation Type   | Gear Transmission                                                 |
| Movement Type    | 2 Forward - 1 Backward                                            |
| Fuel Type        | Euro Diesel                                                       |
| Engine Oil       | 20/50-Sae30                                                       |
| Fuel Tank        | 3,5 L                                                             |
| Working Depth    | 30 CM                                                             |
| Working Width    | 80-130 CM                                                         |
| Amount of Blades | 32 Pcs                                                            |
| Rubber Wheel     | 500-12                                                            |
| Net Weight       | 189,5 KG                                                          |
|                  |                                                                   |



RQDEX

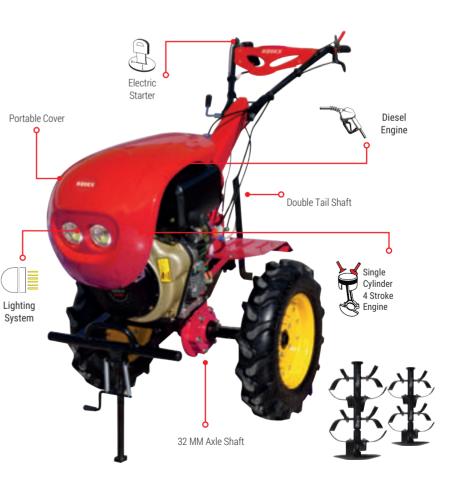

# Electric Starter Diesel Engine Double Tail Shaft Single Cylinder 4 Stroke 4 Strok. Engine

🦪 🏥 🛋 🚄

<u>\_\_\_\_</u>

32 MM Axle Shaft



P 🎸 🍠 👃

### **RDX075** Gasoline Tillers

| 5.5 | Нр | 4 |
|-----|----|---|
|     |    |   |


| Engine Type      | OHV Single Cylinder,<br>Air Cooled, 4 Stroke |
|------------------|----------------------------------------------|
| Engine Power     | 5,5 Hp                                       |
| Starting System  | Recoil Starter                               |
| Operation Type   | Belt Transmission                            |
| Movement Type    | 2 Forward - 1 Backward                       |
| Fuel Type        | Gasoline                                     |
| Engine Oil       | 20/50-Sae30                                  |
| Fuel Tank        | 3,5 L                                        |
| Working Depth    | 30 CM                                        |
| Working Width    | 60-90 CM                                     |
| Amount of Blades | 24 Pcs                                       |
| Rubber Wheel     | 400-8                                        |
| Net Weight       | 79,5 KG                                      |



# **RDX100** Gasoline Tillers

6,5 Нр 🖌

| Engine Type      | OHV, Single Cylinder,<br>Air Cooled, 4 Stroke |
|------------------|-----------------------------------------------|
| Engine Power     | 6,5 Hp                                        |
| Starting System  | Recoil Starter                                |
| Operation Type   | Gear Transmission                             |
| Movement Type    | 2 Forward - 1 Backward                        |
| Fuel Type        | Gasoline                                      |
| Engine Oil       | 20/50-Sae30                                   |
| Fuel Tank        | 3,5 L                                         |
| Working Depth    | 30 CM                                         |
| Working Width    | 110 cm                                        |
| Amount of Blades | 32 Pcs                                        |
| Rubber Wheel     | 400-8                                         |
| Net Weight       | 127,5 KG                                      |
|                  |                                               |

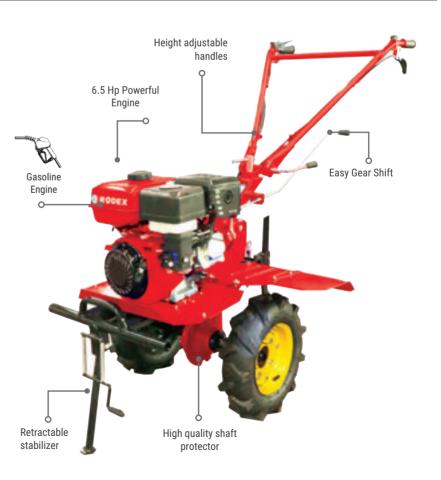

RODEX 71

### **RDX9690 Gasoline Ground Drill** Convenient and Easy Operation 2.0 Hp Drills ground without Pressure with 9.5 kgs of weight 2 HP Double Segman Two Stroke Powerful Engine Ergonomic Handles reduce the hand exhaustion by easy grab. **Engine Power** 2 HP / 52 CC **Drill Diameter** 80 / 200 MM Steel structure that protects machine frame. Speed 6500 RPM Fuel Tank 1 L Engine Oil 20/50-Sae30 Excluding the auger type is Ideal for use for drill works about vine stock, general Net Weight 10KG plants, greenhouse or fence supports, road Pcs 1 lightening.

### **Ground Drill Bits**

RQDEX

| CODE              | DIA    | LENGHT | PCS |
|-------------------|--------|--------|-----|
| RDY160            | 80 MM  | 740 MM | 1   |
| RDY161            | 100 MM | 740 MM | 1   |
| RDY162            | 150 MM | 740 MM | 1   |
| RDY163            | 200 MM | 740 MM | 1   |
| RDY164<br>Adapter | 30 MM  | 345 MM | 10  |

RDY164



TT TP 🞸 🍠 🍠 🗮 😹 🛶

# **RDX716**

### **High Pressure Washer**











| Power                   | 3200 W        |
|-------------------------|---------------|
| Work - Maximum Pressure | 150 - 225 BAR |
| Maximum Flow Speed      | 9,3 L/Min     |
| Hose Length             | 5 M           |
| Net Weight              | 30,1 KG       |
| Pcs                     | 1             |

### **RDX712M High Pressure Washer**







Hose Ree





| Power                   | 2100 W        |
|-------------------------|---------------|
| Work - Maximum Pressure | 110 - 165 BAR |
| Maximum Flow Speed      | 7,5 L/Min     |
| Hose Length             | 5 M           |
| Net Weight              | 19 <b>Kg</b>  |
| Pcs                     | 1             |

RODEX

# **RDX715**

### **High Pressure Washer**





| Power                   | 2700 W        |
|-------------------------|---------------|
| Work - Maximum Pressure | 130 - 195 BAR |
| Maximum Flow Speed      | 9,3 L/Min     |
| Hose Length             | 5 M           |
| Net Weight              | 28 KG         |
| Pcs                     | 1             |
|                         |               |

### **RDX712 High Pressure Washer**











| Power                   | 2100 W        |
|-------------------------|---------------|
| Work - Maximum Pressure | 110 - 165 BAR |
| Maximum Flow Speed      | 7,5 L/Min     |
| Hose Length             | 5 M           |
| Net Weight              | 17 Kg         |
| Pcs                     | 1             |

# **RDX7115 High Pressure Washer 1900** Watt 😽 G Wheel for easy transport 5mt Hose Length Vacuum Systems It can vacum from water tank



0

RODER

6

| Power              | 1900W         |
|--------------------|---------------|
| Maximum Pressure   | 110 - 160 BAR |
| Maximum Flow Speed | 7.4 L/Min     |
| Hose Length        | 5 M           |
| Net Weight         | 8,7 Кg        |
| Pcs                | 1             |


### **RDX710 High Pressure Washer**











| Power              | 1600 W        |
|--------------------|---------------|
| Maximum Pressure   | 90 - 135 BAR  |
| Maximum Flow Speed | 6,8 L/Min     |
| Hose Length        | 5 M           |
| Net Weight         | 6,4 <b>Kg</b> |
| Pcs                | 1             |
|                    |               |









| Power              | 1500 W   |
|--------------------|----------|
| Maximum Pressure   | 100 BAR  |
| Maximum Flow Speed | 580 L/H. |
| Hose Length        | 5 M      |
| Net Weight         | 25 Kg    |
| Pcs                | 1        |
|                    |          |

# **RDX711**

**High Pressure Washer** 



| Power              | 1700W         |
|--------------------|---------------|
| Maximum Pressure   | 100 - 150 BAR |
| Maximum Flow Speed | 6,6L/Min      |
| Hose Length        | 5 M           |
| Net Weight         | 8,5 Kg        |
| Pcs                | 1             |

# **RDX7111 High Pressure Washer**





🤧 🌇 🏹 🌮 🏈 連 🗮 💉

# **RDX7190**

### **Gasoline Pressure Washer**



# 3000 PSI

» POWERFUL 7,0 Hp OHV engine delivers maximum cleaning performance

» Clean smarter. Clean up to 50% faster.

» Power Dial ergonomic spray gun allows you to easily adjust the pressure needed between four different tasks - car, wood, concrete and soap - at your fingertips

» Integrated spray gun holder holds spray gun securely during transport and storage

» Quick change nozzle tips 0°, 25°, 40° and soap

» Power Source Type: Gas Powered

» Welded steel construction frame and premium pneumatic wheels for easy transport, set-up and load

| Power              | 7.0 Hp / 5.2 KW |
|--------------------|-----------------|
| Maximum Pressure   | 207 Bar         |
| Maximum Flow Speed | 720 L/H         |
| Hose Length        | 10 m            |
| Net Weight         | 40 Kg           |
| Pcs                | 1               |

# **RDX7185**

**Gasoline Pressure Washer** 

# 3000 PSI

 > POWERFUL 6,5 Hp OHV engine delivers maximum cleaning performance
 > Clean smarter. Clean up to 50% faster.
 > Power Dial ergonomic spray gun allows you to easily adjust the pressure needed between four different tasks - car, wood, concrete and soap - at your fingertips

 Integrated spray gun holder holds spray gun securely during transport and storage
 Quick change nozzle tips 0°, 25°, 40° and soap

 » Power Source Type: Gas Powered
 » Welded steel construction frame and premium pneumatic wheels for easy transport, set-up and load



6,5 Нр 🕹

| Power              | 6.5 Hp / 4.8 KW |
|--------------------|-----------------|
| Maximum Pressure   | 175 Bar         |
| Maximum Flow Speed | 690 L/H         |
| Hose Length        | 10 m            |
| Net Weight         | 36 <b>Kg</b>    |
| Pcs                | 1               |



**RDX7180** Gasoline Pressure Washer





 POWERFUL 5,5 Hp OHV engine delivers maximum cleaning performance
 Clean smarter. Clean up to 50% faster.
 Power Dial ergonomic spray gun allows you to easily adjust the pressure needed between four different tasks - car, wood, concrete and soap - at your fingertips
 Integrated spray gun holder holds spray gun securely during transport and storage
 Quick change nozzle tips 0°, 25°, 40° and soap
 Power Source Type: Gas Powered

» Welded steel construction frame and premium pneumatic wheels for easy transport, set-up and load



| Power              | 5.5 Hp / 4.2 KW |
|--------------------|-----------------|
| Maximum Pressure   | 154 Bar         |
| Maximum Flow Speed | 580 L/H         |
| Hose Length        | 7.5 m           |
| Net Weight         | 31 <b>Kg</b>    |
| Pcs                | 1               |



rodexpower.com (f) (b) (rodextools




**12** 🥑 🏥 🚟 19 

# **RDX040**

**Gasoline Water Pump** 




| Engine Power    | 7,0 HP                                        |
|-----------------|-----------------------------------------------|
| Engine Type     | OHV, Single Cylinder,<br>Air Cooled, 4 Stroke |
| In-out Diameter | 100 MM (4")                                   |
| Max Water       | 20 M                                          |
| Suction Length  | 7 M                                           |
| Capacity        | 1250 L / Min.                                 |
| Fuel Tank       | 3,6 L                                         |
| Engine Oil      | 20/50-Sae30                                   |
| Net Weight      | 28 KG                                         |
| Pcs             | 1                                             |

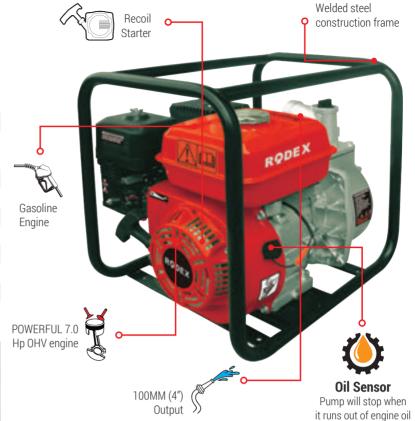



**RDX030 Gasoline Water Pump** 

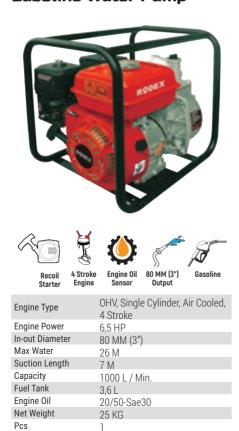

RQDEX

**Gasoline Water Pump** 

I 4 Str Engi Recoil Starter

**RDX020** 

Engine Type

| oke | Engine Oil | 50 MM (2")   | Gasoline    |
|-----|------------|--------------|-------------|
| ine | Sensor     | Output       |             |
|     | OHV, Sing  | le Cylinder, | Air Cooled, |

|                 | 4 SUROKE    |
|-----------------|-------------|
| Engine Power    | 6,5 HP      |
| In-out Diameter | 50 mm(2")   |
| Max Water       | 23 M        |
| Suction Length  | 7 M         |
| Capacity        | 500 L/Min.  |
| Fuel Tank       | 3,6 L       |
| Engine Oil      | 20/50-Sae30 |
| Net Weight      | 24 KG       |
| Pcs             | 1           |
|                 |             |

# **RDX010 Gasoline Water Pump**



4 Stroke Engine Recoil Starter

20

Ţ

Engine Oil 25 Sensor (


| S                 | Þ        |
|-------------------|----------|
| MM (1")<br>Dutput | Gasoline |

| Engine Type     | OHV, Single Cylinder, Air Cooled,<br>4 Stroke |
|-----------------|-----------------------------------------------|
| Engine Power    | 1,2 HP                                        |
| In-out Diameter | 25 mm(1")                                     |
| Max Water       | 30 M                                          |
| Suction Length  | 8 M                                           |
| Capacity        | 133 L/Min.                                    |
| Fuel Tank       | 1,1 L                                         |
| Engine Oil      | 20/50-Sae30                                   |
| Net Weight      | 8,2 KG                                        |
| Pcs             | 1                                             |

### **Diesel Water Pump**



| Engine Power    | 9,0 HP                                                  |
|-----------------|---------------------------------------------------------|
| Engine Type     | Single Cylinder, Air<br>Cooled, 4 Stroke, Diesel Engine |
| In-out Diameter | 100 MM (4")                                             |
| Max Water       | 25 M                                                    |
| Suction Length  | 7 M                                                     |
| Capacity        | 1000 L / Min.                                           |
| Fuel Tank       | 5,5 L                                                   |
| Engine Oil      | 20/50-Sae30                                             |
| Net Weight      | 65 KG                                                   |
| Pcs             | 1                                                       |

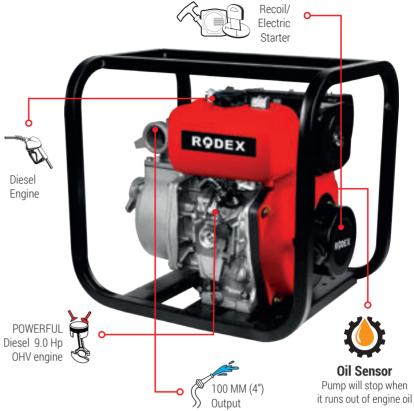







| Recoil 4 Stroke<br>Starter Engine | e Engine Oil 80 MM (3") Diesel<br>Sensor Output         |
|-----------------------------------|---------------------------------------------------------|
| Engine Type                       | Single Cylinder, Air Cooled,<br>4 Stroke, Diesel Engine |
| Engine Power                      | 5,2 HP / 3,8 KW                                         |
| In-out Diameter                   | 80 MM (3")                                              |
| Max Water                         | 28 M                                                    |
| Suction Length                    | 7 M                                                     |
| Capacity                          | 600 L / Min.                                            |
| Fuel Tank                         | 3,5 L                                                   |
| Engine Oil                        | 20/50-Sae30                                             |
| Net Weight                        | 45 KG                                                   |
| Pcs                               | 1                                                       |

Ø

S

### **RDX053 Diesel Water Pump**



I Recoil Starter



| Engine Type     | Single Cylinder, Air Cooled,<br>4 Stroke, Diesel Engine |
|-----------------|---------------------------------------------------------|
| Engine Power    | 5,2 HP / 3,4 KW                                         |
| In-out Diameter | 80 MM (3")                                              |
| Max Water       | 28 M                                                    |
| Suction Length  | 7 M                                                     |
| Capacity        | 600 L / Min.                                            |
| Fuel Tank       | 3,5 L                                                   |
| Engine Oil      | 20/50-Sae30                                             |
| Net Weight      | 45 KG                                                   |
| Pcs             | 1                                                       |

# **RDX052 Diesel Water Pump**



Recoil Starter 4 Stroke Engine

Å

Diesel

Z

Å S Engine Oil 50 MM (2") Sensor Output

Diesel

| Engine Type     | Single Cylinder, Air Cooled,<br>4 Stroke, Diesel Engine |
|-----------------|---------------------------------------------------------|
| Engine Power    | 3,4 HP / 2,5 KW                                         |
| In-out Diameter | 50 MM (2")                                              |
| Max Water       | 25 M                                                    |
| Suction Length  | 7 M                                                     |
| Capacity        | 367 L / Min.                                            |
| Fuel Tank       | 2,5 L                                                   |
| Engine Oil      | 20/50-Sae30                                             |
| Net Weight      | 35 KG                                                   |
| Pcs             | 1                                                       |

**RDX8151 Carry Handle Clean Water Submersible Pump**  Power Cable **900** Watt **AUTOMATIC FLOAT SWITCH** » 15 Tons of water drainage per hour Floater stops the » 10 mt. Cable for deep wells. pump automatically » 9.5M height flowage capacity **Output tie-in** 0 » Floater stops the pump automatically when the water runs 3/4" -1 1/4" when the water runs out. out. Power 900 W Maximum Height 10 M o 15 TONS 15 Tons of water Capacity 15000 L/H drainage per hour **Hose Connection** 3/4" -1 1/4" Cable Length 10 M Weight 5.45 KG - 4.6 KG 0 Water suction port Pcs 4

# **RDX814**

**Clean Water Submersible Pump** 





| Power           | 400 W/        |
|-----------------|---------------|
|                 | 400 W         |
| Maximum Height  | 8 M           |
| Capacity        | 7000 L/H      |
| Hose Connection | 3/4" -1 1/4"  |
| Cable Length    | 10 M          |
| Weight          | 4 KG - 3,4 KG |
| Pcs             | 4             |

**RODEX** 

# **RDX845**

TP 🎸 🍠 連 🗮 承

<u>\_\_\_\_</u>

### **Clean Water Submersible Pump**



| Power           | 800 W           |
|-----------------|-----------------|
| Maximum Height  | 30 M            |
| Capacity        | 90 L/Min.       |
| Hose Connection | 3/4" -1 1/4"    |
| Cable Length    | 10 M            |
| Weight          | 7,5 KG - 6,2 KG |
| Pcs             | 4               |
|                 |                 |

# 

# **RDX8318**

**Clean Water Submersible Pump** 



| Power           | 370 W     |
|-----------------|-----------|
| Maximum Height  | 19 M      |
| Capacity        | 75 L/Min. |
| Hose Connection | 1"        |
| Cable Length    | 8 M       |
| Net Weight      | 9 KG      |
| Pcs             | 1         |

# **RDX8332**

### Clean Water Submersible Pump



| Power           | 750 W      |
|-----------------|------------|
| Maximum Height  | 33 M       |
| Capacity        | 125 L/Min. |
| Hose Connection | 1"         |
| Cable Length    | 8 M        |
| Net Weight      | 12,2 KG    |
| Pcs             | 1          |
|                 |            |

# RDX8325

Clean Water Submersible Pump



| Power           | 550 W      |
|-----------------|------------|
| Maximum Height  | 26 M       |
| Capacity        | 100 L/Min. |
| Hose Connection | 1"         |
| Cable Length    | 8 M        |
| Net Weight      | 11,1 KG    |
| Pcs             | 1          |

RODEX

# **RDX835**

### Clean Water Submersible Pump



| Power           | 1100 W    |
|-----------------|-----------|
| Maximum Height  | 40 M      |
| Capacity        | 60 L/Min. |
| Hose Connection | 1"        |
| Cable Length    | 9 M       |
| Net Weight      | 16,3 KG   |
| Pcs             | 1         |
|                 |           |

### **Dirty Water Submersible Pump Carry Handle** Power Cable **900** Watt 4 **AUTOMATIC FLOAT SWITCH** Floater stops the pump automatically **Output tie-in** when the water runs » 17 Tons of water drainage per hour » 10 mt. Cable for deep wells. out. 3/4" -1 1/4" » 9.5M height flowage capacity » Floater stops the pump automatically when the water runs out. Power 900 W o 17 TONS 17 Tons of water RODEX Maximum Height 9 M drainage per hour Capacity 17000 L/H **Hose Connection** 3/4" -1 1/4" Cable Length 10 M 900 Watt 0 Weight 5.02 KG - 4.6 KG 900W Power Water suction port Engine Water Lift Pcs This submersible water pump 4 up to 9 Mt. easily passes solids up to 35mm

# **RDX840**

### Clean / Dirty Water Submersible Pump



Power Maximum Height Capacity Hose Connection Cable Length Net Weight Pcs

RQDEX

1100 W 11 M 155000 L/Min. 3/4" -1 1/4" 10 M 7,35 Kg 4

# **RDX8421**

19 19 🗳 🌍 🚚 🗮 🚄

### Submersible Sewage Pump

in diameter.



| Power           | 1100 W     |
|-----------------|------------|
| Maximum Height  | 8 M        |
| Capacity        | 1.5m³ L/H. |
| Hose Connection | 2"         |
| Cable Length    | 6 M        |
| Net Weight      | 15,7 Kg    |
| Pcs             | 1          |
|                 |            |

### **RDX858 Pump Regulator**



» 1 m cable

### » Barometer

| Voltage          | 220V          |
|------------------|---------------|
| Work Pressure    | 1.5 - 2.2 Bar |
| In-Out Diameter  | 25mm 1"       |
| Protection Class | IP44          |
| Net Weight       | 1.25 KG       |
| Pcs              | 12            |

### **RDX852 Pump Regulator**



### » Barometer

| Salometer        |               |
|------------------|---------------|
| Voltage          | 220V          |
| Work Pressure    | 1.5 - 2.2 Bar |
| In-Out Diameter  | 25mm 1"       |
| Protection Class | IP54          |
| Net Weight       | 1,04 KG       |
| Pcs              | 12            |

# **RDX855**

"<u>]</u> "P 🗳 🔗 連 🧮 🚄

**Pump Regulator** 



| Voltage          | 220V          |
|------------------|---------------|
| Work Pressure    | 1.5 - 2.2 Bar |
| In-Out Diameter  | 25mm 1"       |
| Protection Class | IP65          |
| Net Weight       | 1,45 KG       |
| Pcs              | 12            |

# **RDX892**

**Circulation Pumps** 



- » Three speeds control
- » The pump runs almost silently
- Small dimensions
   Low power consumption
- » Insulation class: H

» Pump housing: Cast Iron; Impeller: Corrosion-resistant, Composite, PES ;Shaft: Ceramic; Bearing: Carbon axial

| Power           | 93/67/46 W       |
|-----------------|------------------|
| Maximum Head    | 6/5/3 M          |
| Hose Connection | 25mm 1,5"        |
| Capacity        | 65/52/33 Lt/Min. |
| Net Weight      | 2,7 KG           |
| Pcs             | 8                |

### **RDX893 Circulation Pumps**



- » Three speeds control » The pump runs almost silently
- » Small dimensions
   » Low power consumption
- » Insulation class: H
- » Pump housing: Cast Iron; Impeller: Corrosion-resistant, Composite, PES ;Shaft: Ceramic; Bearing: Carbon axial

| Power           | 120/93/67 W      |
|-----------------|------------------|
| Maximum Head    | 7/6/5,5 M        |
| Hose Connection | 25mm 1,5"        |
| Capacity        | 68/55/45 Lt/Min. |
| Net Weight      | 3,45 KG          |
| Pcs             | 4                |

### **RDX894 Circulation Pumps**



» Three speeds control

- » The pump runs almost silently
- Small dimensions
   Low power consumption
- » Insulation class: H
- » Pump housing: Cast Iron; Impeller: Corrosion-resistant, Composite, PES ;Shaft: Ceramic; Bearing: Carbon axial

| Power           | 120/93/67 W      |
|-----------------|------------------|
| Maximum Head    | 7/6/5,5 M        |
| Hose Connection | 50mm - 2"        |
| Capacity        | 68/55/45 Lt/Min. |
| Net Weight      | 3,75 KG          |
| Pcs             | 4                |


**Garden Water Pump** 



» Powerful Suction: 1.0 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 30M deep.

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump.

| Power           | 750 W / 1.0 HP |
|-----------------|----------------|
| Maximum Height  | 30 M           |
| Maximum Suction | 9 M            |
| Hose Connection | 1"             |
| Capacity        | 120 Lt/Min.    |
| Net Weight      | 11,9 KG        |
| Pcs             | 1              |

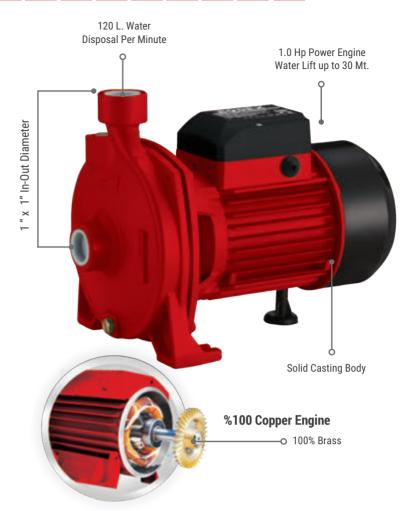

12

1

# RDX880 Garden Water Pump

» Powerful Suction: 1.5 HP electric motor can provide high flow rate with strong suction

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast iron casing

RDX871 Garden Water Pump Stainless steel



%100 Copper Engine



» Powerful Suction: 800 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 38M deep.

 $\ensuremath{\mathsf{*}}$  Corrosion-resistant stainless steel construction extends product life and is easy to clean.

| Power           | 1100 W / 1,5 HP |
|-----------------|-----------------|
| Maximum Height  | 16 M            |
| Maximum Suction | 9 M             |
| Hose Connection | 2" X 2"         |
| Capacity        | 350 Lt/Min.     |
| Net Weight      | 20 KG           |
| Pcs             | 1               |

ensure durability and high performance of this well sealed pump.



| Power           | 800 W / 0.5 Hp |            |
|-----------------|----------------|------------|
| Maximum Height  | 38 M           |            |
| Maximum Suction | 8 M            |            |
| Hose Connection | 1" X 1"        |            |
| Capacity        | 58 Lt/Min.     |            |
| Net Weight      | 8,5 KG         |            |
| Pcs             | 1              | 100% Brass |
|                 |                |            |



power, designed for wells up to 16M deep.

**Garden Water Pump** 





» Powerful Suction: 0,5 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 35M deep.

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump.

|                 |               | %100 Copper Engine |
|-----------------|---------------|--------------------|
| Power           | 370 W / 0,5HP |                    |
| Maximum Height  | 35 M          |                    |
| Maximum Suction | 9 M           |                    |
| Hose Connection | 1" X 1"       |                    |
| Capacity        | 35 Lt/Min.    |                    |
| Net Weight      | 5,08 KG       |                    |
| Pcs             | 6             | 100% Brass         |

# **RDX875**

**Garden Water Pump** 





» Powerful Suction: 1,5 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 45M deep.

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast **iron casing** ensure durability and high performance of this well sealed pump.

| Power           | 1100 W / 1,5HP |
|-----------------|----------------|
| Maximum Height  | 45 M           |
| Maximum Suction | 9 M            |
| Hose Connection | 1" X 1"        |
| Capacity        | 60 Lt/Min.     |
| Net Weight      | 16,8 KG        |
| Pcs             | 1              |



# **RDX874**

**Garden Water Pump** 





**T T T** ¥ \$ ... 🗮

» Powerful Suction: 1.0 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 60M deep.

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump.

|                 |                | %100 Copper Engine |
|-----------------|----------------|--------------------|
| Power           | 750 W / 1,0 HP |                    |
| Maximum Height  | 60 M           |                    |
| Maximum Suction | 8 M            |                    |
| Hose Connection | 1" X 1"        |                    |
| Capacity        | 50 Lt/Min.     |                    |
| Net Weight      | 8,5 KG         |                    |
| Pcs             | 1              | 100% Brass         |

**RDX876 Garden Water Pump** 





» Powerful Suction: 1.0 HP electric motor can provide high flow rate with strong suction power, designed for wells up to 30M deep.

» Durable Cast Iron Volute: Exquisite craftsmanship and rugged cast **iron casing** ensure durability and high performance of this well sealed pump.

| Power           | 750 W / 1,0 HP |      |
|-----------------|----------------|------|
| Maximum Height  | 30 M           |      |
| Maximum Suction | 9 M            |      |
| Hose Connection | 1" X 1"        |      |
| Capacity        | 120 Lt/Min.    |      |
| Net Weight      | 15,3 KG        |      |
| Pcs             | 1              | 100% |



RQDEX

### Deep Well Pump

### **High-quality Material**


"**?**)

Î

The submersible well pump comprises 304 stainless steel and a built-in check valve, rustproof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

**1100** Watt **Power** 1100 W / 1.5 Hp

| Maximum Height  | 149 M       |
|-----------------|-------------|
| Capacity        | 3.3m³/H     |
| Hose Connection | 1" - 25mm   |
| Cable Length    | 2M          |
| Size            | 100x1164 mm |
| Net Weight      | 18,10 KG    |
| Pcs             | 1           |



# RDX8803 Deep Well Pump



» The submersible well pump comprises 304 stainless steel and a built-in check valve, rust-proof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

» High strength anti-sand fluid components can applied to harsh working conditions.

» The hermetically sealed motor is thermally protected to prevent overheating.

### **IP54**

| Power           | 550 W / 0.75 Hp |
|-----------------|-----------------|
| Maximum Height  | 89 M            |
| Capacity        | 2.7m³/H         |
| Hose Connection | 1" - 25mm       |
| Cable Length    | 1.5 M           |
| Size            | 75x1062mm       |
| Net Weight      | 10,40 KG        |
| Pcs             | 1               |

RQDEX



### Suction center

High strength anti-sand fluid components can applied to harsh working conditions.

> The hermetically sealed motor is thermally protected to prevent overheating.



**IP54** 

Ø 100

.164mm

RDX8823 Deep Well Pump



» The submersible well pump comprises 304 stainless steel and a built-in check valve, rust-proof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

» High strength anti-sand fluid components can applied to harsh working conditions.

» The hermetically sealed motor is thermally protected to prevent overheating.

### **IP54**

| Power           | 750 W / 1.0 Hp |
|-----------------|----------------|
| Maximum Height  | 115M           |
| Capacity        | 2.7m³/H        |
| Hose Connection | 1" - 25mm      |
| Cable Length    | 1.7M           |
| Size            | 75x1238mm      |
| Net Weight      | 11,80 KG       |
| Pcs             | 1              |



2200 Watt 🐇

Maximum Height

Hose Connection

Cable Length

Net Weight

Power

Capacity

Size


Pcs

### **Deep Well Pump**

### **High-quality Material**

The submersible well pump comprises 304 stainless steel and a built-in check valve, rustproof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

2200 W / 3.0 Hp 3.3m<sup>3</sup>/H 1" - 25mm 100x1709mm 28,20 KG



262M

2.8M

### **RDX8843 Deep Well Pump**



» The submersible well pump comprises 304 stainless steel and a built-in check valve, rust-proof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

» High strength anti-sand fluid components can applied to harsh working conditions.

» The hermetically sealed motor is thermally protected to prevent overheating.

### **IP54**

| Power           | 1100 W / 1.5 Hp |
|-----------------|-----------------|
| Maximum Height  | 162M            |
| Capacity        | 2.7m³/H         |
| Hose Connection | 1" - 25mm       |
| Cable Length    | 2M              |
| Size            | 75x1594mm       |
| Net Weight      | 15,70 KG        |
| Pcs             | 1               |



# **IP54** Ø 100 Suction center High strength anti-sand fluid components can applied to harsh working conditions. The hermetically sealed motor is thermally overheating.

### **RDX8824 Deep Well Pump**

# 1500 Watt 4

» The submersible well pump comprises 304 stainless steel and a built-in check valve, rust-proof and corrosion-proof. You can get our durable and sturdy pump for a long time use.

» High strength anti-sand fluid components can applied to harsh working conditions.

» The hermetically sealed motor is thermally protected to prevent overheating.

### **IP54**

| Power           | 1500 W / 2.0 Hp |
|-----------------|-----------------|
| Maximum Height  | 198M            |
| Capacity        | 3.3m³/H         |
| Hose Connection | 1" - 25mm       |
| Cable Length    | 2.4M            |
| Size            | 100x1385mm      |
| Net Weight      | 22,10 KG        |
| Pcs             | 1               |



.709mm

RQDEX





### Jet Pump with Pressure Tank



19 🔊 🏈 🍠 🖽 😹

» Durable Cast Iron Body: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump.
 » Class B insulation

- » Equipped with built-in thermal protection » Impeller made of brass
- » Small dimensions

| Power           | 400W        |
|-----------------|-------------|
| Maximum Height  | 35 M        |
| Maximum Suction | 8 M         |
| Pressure        | 1,5 - 3 BAR |
| Hose Connection | 1" x 1"     |
| Capacity        | 2 m³/H      |
| Net Weight      | 8,4 KG      |
| Pcs             | 1           |





<u>\_\_\_\_</u>

# **RDX8636**

### Jet Pump with Pressure Tank

» Durable Cast Iron Body: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump. » Class B insulation

- » Equipped with built-in thermal protection » Impeller made of brass

» Small dimensions

| Power           | 600W        |
|-----------------|-------------|
| Maximum Height  | 45 M        |
| Maximum Suction | 8 M         |
| Pressure        | 1,5 - 3 BAR |
| Hose Connection | 1" x 1"     |
| Capacity        | 2.8 m³/H    |
| Net Weight      | 11,4 KG     |
| Pcs             | 1           |

# **RDX8638**

### Jet Pump with Pressure Tank

» Durable Cast Iron Body: Exquisite craftsmanship and rugged cast iron casing ensure durability and high performance of this well sealed pump.
» Class B insulation

- » Equipped with built-in thermal protection
- » Impeller made of brass
- » Small dimensions

| Power           | 800W        |
|-----------------|-------------|
| Maximum Height  | 55 M        |
| Maximum Suction | 8 M         |
| Pressure        | 1,5 - 3 BAR |
| Hose Connection | 1" x 1"     |
| Capacity        | 3 m³/H      |
| Net Weight      | 12,6 KG     |
| Pcs             | 1           |

RODEX ·





750 Watt 4

# **RDX847**

### Jet Pump with Pressure Tank

» 1.0 HP Shallow well jet with tan, designed for residential applications to deliver potable water to the home, cottage or farm from a well with a maximum vertical lift of 45M

» Rugged cast iron construction; Tough thermoplastic impeller and glass filled thermoplastic diffuser.

» Continuous duty, thermally protected split capacitor motor; Dual voltage motor.

| 750 W / 1.0 HP |
|----------------|
| 45 M           |
| 8 M            |
| 1,8 - 3 BAR    |
| 1"             |
| 55 L / Min.    |
| 19 KG          |
| 1              |
|                |

# **RDX849**

### **Jet Pump with Pressure Tank**

» 1.5 HP Shallow well jet with tan, designed for residential applications to deliver potable water to the home, cottage or farm from a well with a maximum vertical lift of 50M

» Rugged cast iron construction; Tough thermoplastic impeller and glass filled thermoplastic diffuser.

» Continuous duty, thermally protected split capacitor motor; Dual voltage motor.

| Power           | 1100 W / 1.5 HP |
|-----------------|-----------------|
| Maximum Height  | 50 M            |
| Maximum Suction | 8 M             |
| Pressure        | 1,8 - 3 BAR     |
| Hose Connection | 1"              |
| Capacity        | 60 L / Min.     |
| Net Weight      | 19 KG           |
| Pcs             | 1               |

# **RDX850**

### Jet Pump with Pressure Tank

» 1.0 HP Shallow well jet with tan, designed for residential applications to deliver potable water to the home, cottage or farm from a well with a maximum vertical lift of 45M

» Rugged cast iron construction; Tough thermoplastic impeller and glass filled thermoplastic diffuser.

» Continuous duty, thermally protected split capacitor motor; Dual voltage motor.

| Power           | 1200 W / 1.0 HP |
|-----------------|-----------------|
| Maximum Height  | 45 M            |
| Maximum Suction | 8 M             |
| Pressure        | 1,8 - 3 BAR     |
| Hose Connection | 1"              |
| Capacity        | 55 L / Min.     |
| Net Weight      | 13,7 KG         |
| Pcs             | 1               |





13 19 🗳 🌍 連 🗒











www.rodexpower.com 🌱 🎮 🎲 🎸 🤌 🚊 🗮 👞 🛶

| RDX258<br>Gasoline Chain Saw<br>58 cc 2 3.8Hp<br>50 Cm Professional Guide<br>Bar Hardened With<br>Induction System. | © ."RQD        | EX 225"                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Power                                                                                                               | 58 CC / 3,8 Hp |                                                                                                                                                    |
| Cutting Length                                                                                                      | 500MM          |                                                                                                                                                    |
| Chain                                                                                                               | 38 Teeth       |                                                                                                                                                    |
| Fuel Tank                                                                                                           | 550 ML         |                                                                                                                                                    |
| Oil Tank                                                                                                            | 260 ML         |                                                                                                                                                    |
| Net Weight                                                                                                          | 7,37 KG        | 58 CC 3,8 HP Easy Start Break 38 Teeth High 50 CM Ergonomic                                                                                        |
| Pcs                                                                                                                 | 4              | 58 CC 3,8 HP Easy Start Break 38 Teeth High 50 CM Ergonomic<br>Power Engine Technology Lever Quality Chain Professional Handle Design<br>Guide Bar |

# RDX906

| Electric Chain Saw 2400 Watt | 0          | * RQDEX                  |       |                                  | RODEX                     |            |               |
|------------------------------|------------|--------------------------|-------|----------------------------------|---------------------------|------------|---------------|
| Power                        | 2400 W     |                          |       |                                  |                           | 1 A        |               |
| Speed                        | 13.1 M/S   |                          |       |                                  |                           |            |               |
| Cutting Length               | 400MM      |                          |       |                                  | ~                         |            |               |
| Chain                        | 28,5 Teeth | Õ                        |       | 9552                             | A MARKED                  |            | ( Prop)       |
| Net Weight                   | 6,0 KG     |                          |       | Les S                            |                           |            | $\square$     |
| Pcs                          | 2          | Easy Start<br>Technology | Break | 28.5 Teeth High                  | 50 CM                     | Easy Chain | Ergonomic     |
| Chain Lubrication System     | Yes        | Technology               | Lever | 28,5 Teeth High<br>Quality Chain | Professional<br>Guide Bar | Adjustable | Handle Design |



91

7 17 19 💉 🔿 🚛 🗮 👞 🛶

# **RDX9648**

**Gasoline Lawn Mower** 



| Power          | 173 CC / 5,5Hp             |
|----------------|----------------------------|
| Blade Size     | 510 MM                     |
| Cutting Height | 30 - 80 MM (5 Stages)      |
| Drive Type     | Self Propolled / Hand Push |
| Collection Bag | 70 Lt                      |
| Fuel Tank      | 1500 ML                    |
| Oil Capacity   | 600 ML                     |
| Net Weight     | 36,6 KG                    |
| Pcs            | 1                          |
|                |                            |

# **RDX9640**

### **Gasoline Lawn Mower**



| Power          | 139 CC/4,0Hp         |
|----------------|----------------------|
| Blade Size     | 460 MM               |
| Cutting Height | 25 - 76 MM (5 Stage) |
| Drive Type     | Hand Push            |
| Collection Bag | 55 LT                |
| Fuel Tank      | 1200 ML              |
| Oil Capacity   | 600 ML               |
| Net Weight     | 30,8 KG              |
| Pcs            | 1                    |

# **RDX9645**

**Gasoline Lawn Mower** 



| Power          | 163 CC/5,5Hp |
|----------------|--------------|
| Blade Size     | 510 MM       |
| Cutting Height | 30 - 80 MM   |
| Drive Type     | Hand Push    |
| Collection Bag | 70 Lt        |
| Fuel Tank      | 1500 ML      |
| Oil Capacity   | 600 ML       |
| Net Weight     | 34,2 KG      |
| Pcs            | 1            |
|                |              |





| Power          | 1600 W     |
|----------------|------------|
| Blade Size     | 380 MM     |
| Cutting Height | 28 - 68 MM |
| Collection Bag | 50 Lt      |
| Net Weight     | 19,5 KG    |
| Pcs            | 1          |

# <complex-block>

TT TP 🞸 🔗 🔎 🗮 🝝

| 1000 W   |
|----------|
| 340 MM   |
| 30-64 MM |
| 30 Lt    |
| 19,5 KG  |
| 1        |
|          |

# RDX932





**RDX923 Sheep Clipper** ON-OFF Switch Cooling ribs with special filters prevent unwanted materials going inside the machine and Offers the opportunity to work-500 Watt 🖌 minimizes the heating. tirelessly with balanced weight distribution. More fleece wool can be obtained by slim cut feature. 80 mm blade provides faster cutting RODEX Electronic Speed Adjustment Provides long lasting works with its constant cycle Enables easy cut with its strengthened blades. No pulling or tatstructure tering. Blade frame and protective part minimize the sheepskin injuries. **RDY902** Metal Carry Case Spare Blade Body RODEX Professional electrical sheep clipper provides perfect and fast cut with its 500

🦪 🏥 📆

17 D 🟹

provides perfect and fast cut with its 500 watt cutting power. Provides easy working environment with its long cable.

| Power      | 500 W      |
|------------|------------|
| Blade      | 80 MM      |
| Speed      | 0-2400 RPM |
| Net Weight | 3,4 KG     |
| Pcs        | 5          |

RQDEX



17 💉 🎅 🍠

**RDX9625** 



2 in 1 Battery Sprayer (Cordless & Manual Type)



TP 🖌 🔿 🍠 🔳 🗮 🚄

| Power                              | 12 VDC - 8 Ah   |
|------------------------------------|-----------------|
| Chemical Tank                      | 16 L            |
| Disinfection Distance (Horizontal) | 5 M             |
| Battery Type                       | 12V - 8Ah       |
| Pressure                           | 0,15 - 0,55 Mpa |
| Charge Time                        | 8 Hours         |
| Continuous Work                    | 6 Hours         |
| Net Weight                         | 5,8 KG          |
| Pcs                                | 1               |

RQDEX

Ideal for chemical liquid spraying for agricultural spraying and disinfection.

### The following areas:

Short trees, greenhouses, plant protection, insecticides and environmental disinfection etc.

### **Product Features**

- Adjustable/telescopically stainless
   steel pipe
- Spraying length of more than 5 M with 220 CM pipe and hose
- $\boldsymbol{\cdot}$  With 3 different plastic nozzle
- With 5 hole flower nozzle
- Quiet and powerful cordless motor
- Backpack holder option
- Adjustable spray speed with regulator.
- 2in1 Usable with Battery and Manual.

**RDX9617 Battery Sprayer** 

### **Product Features**

- Adjustable/telescopically stainless steel pipe Spraying length of more than 5 M with
- 220 CM pipe and hose
- With 3 different plastic nozzle • With 5 hole flower nozzle
- Quiet and powerful cordless motor
- Backpack holder option
- · Adjustable spray speed with regulator.

Ideal for chemical liquid spraying for agricultural spraying and disinfection.

The following areas: Short trees, greenhouses, plant protection,

insecticides and environmental disinfection etc.

| Power                                 | 12 VDC - 8 Ah   |
|---------------------------------------|-----------------|
| Chemical Tank                         | 16 L            |
| Disinfection Distance<br>(Horizontal) | 5 M             |
| Battery Type                          | 12V - 8Ah       |
| Pressure                              | 0,15 - 0,55 Mpa |
| Charge Time                           | 8 Hours         |
| Continuous Work                       | 6 Hours         |
| Net Weight                            | 5,25 KG         |
| Pcs                                   | 1               |
|                                       |                 |



Adjustable/Telescopically Stainless Steel Pipe





TP 🎸 资 🍠 🗮 😹



# **RDX9618**

### **Battery Sprayer**

### **Product Features**

- Adjustable/telescopically stainless steel pipe • Spraying length of more than 5 M with
- 220 CM pipe and hose
- With 3 different plastic nozzle
- With 5 hole flower nozzle
- Quiet and powerful cordless motor
- Backpack holder option
- · Adjustable spray speed with regulator.

Ideal for chemical liquid spraying for agricultural spraying and disinfection.

### The following areas:

Short trees, greenhouses, plant protection, insecticides and environmental disinfection etc.

| Power                                 | 12 VDC - 8 Ah   |
|---------------------------------------|-----------------|
| Chemical Tank                         | 16 L            |
| Disinfection Distance<br>(Horizontal) | 5 M             |
| Battery Type                          | 12V - 8Ah       |
| Pressure                              | 0,15 - 0,55 Mpa |
| Charge Time                           | 8 Hours         |
| Continuous Work                       | 6 Hours         |
| Net Weight                            | 4,8 KG          |
| Pcs                                   | 1               |







### **Gasoline Pump Sprayer**



Chemical tank strainer Prevents damages that may happen while filling the chemical, by straining it to filtrate solid particles Mono or triple sprinkler options.

RODEX

25 Lt Big Chemical Tank 25 Lt Big Chemical Tank Having a big chemical tank increases the square meter of the area that will be applied chemical at one shot and provides time-fuel saving.

| Power                                 | 26 CC / 0,84 HP |  |
|---------------------------------------|-----------------|--|
| Chemical Tank                         | 25 L            |  |
| Disinfection Distance<br>(Horizontal) | Adjustable      |  |
| Spray Rate                            | 6 L/Min.        |  |
| Fuel Tank Cap.                        | 0,61 L          |  |
| Net Weight                            | 12,3 KG         |  |
| Pcs                                   | 1               |  |

4 STROKE 25cc Power engine

# Adjustable Spray Gun

Provides long distance spraying when • the gun lever turned left and short distance spraying when turned right.



| Power                              | 50CC / 2.9HP | Power                              | 50CC / 2.9HP |
|------------------------------------|--------------|------------------------------------|--------------|
| Chemical Tank                      | 14 LT        | Chemical Tank                      | 20 Lt        |
| Disinfection Distance (Horizontal) | 12 M         | Disinfection Distance (Horizontal) | 12 M         |
| Spray Rate                         | 14 M         | Spray Rate                         | 14 M         |
| Fuel Tank Cap.                     | 1.35 ML      | Fuel Tank Cap.                     | 1.35 ML      |
| Net Weight                         | 10.5 KG      | Net Weight                         | 13 KG        |
| Pcs                                | 1            | Pcs                                | 1            |



99

19 19 2

# RDX9633

### **Gasoline Grass Trimmer**




2 Stroke Power Engine 1.9 HP high torque engine works with maximum performance while trimming grass, branch, turf etc.

### Long lasting air filter system It increases the lifetime of the engine remarkably.

Easy On Technology,

Easy Operation



Adjustable Handlebars Bicycle type handlebar used with hanger provides easier and more controlled trimming on wide areas. User work more efficiently by avoiding the exhaustion



Trimmer Blade

Trimmer Blade

Trimmer Head Solid Extension Arm Reinforced extension bar provides maximum protection against impacts

Protective shield

Produced by unbreakable

hard PVC prevents possible

accidents and cuts off trimmer


line left automatically.



Strap Backpack When the machine used with hanger, it provides easier and more controlled cutting on wide areas. User work more efficiently by avoiding the exhaustion.

| Power            | 52 CC / 1,6HP /<br>2,8 KW |
|------------------|---------------------------|
| Cutting Diameter | 255 M                     |
| Usage            | Shoulder Type             |
| Shaft Type       | Flat / 26 MM              |
| Handle           | Bicycle Type              |
| Fuel Tank        | 1,2 L                     |
| Net Weight       | 9,9 KG                    |
| Pcs              | 1                         |

### **Gasoline Grass Trimmer**

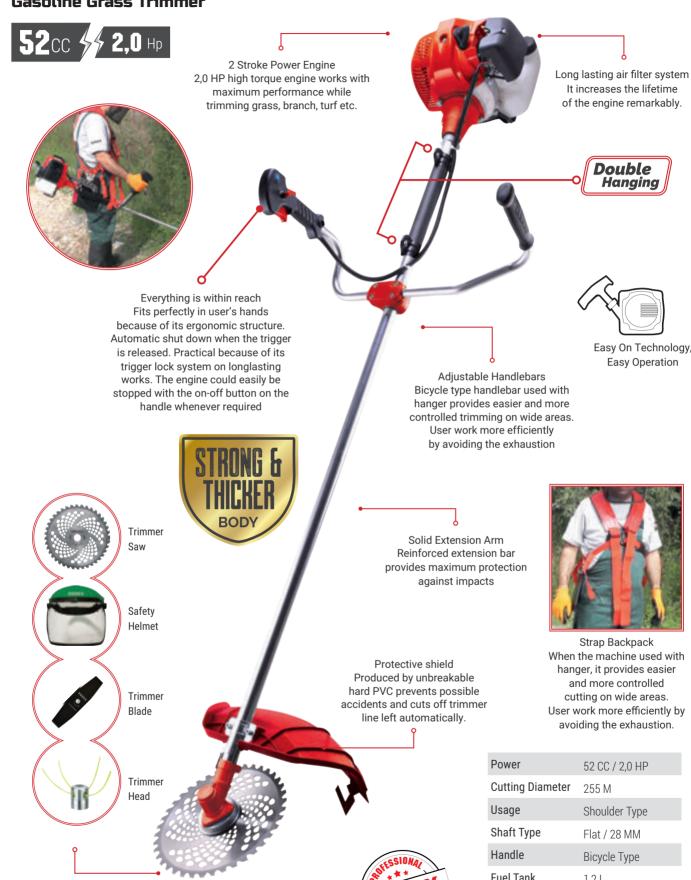

Easy On Technology, Easy Operation

Double Hanging


Strap Backpack When the machine used with hanger, it provides easier and more controlled cutting on wide areas. User work more efficiently by avoiding the exhaustion.


| Power            | 52 CC / 2,0 HP |
|------------------|----------------|
| Cutting Diameter | 255 M          |
| Usage            | Shoulder Type  |
| Shaft Type       | Flat / 28 MM   |
| Handle           | Bicycle Type   |
| Fuel Tank        | 1,2 L          |
| Net Weight       | 7,86 KG        |
| Pcs              | 1              |

AL 📆 🏦 🌮

# **RDX9636**

**Gasoline Grass Trimmer** 

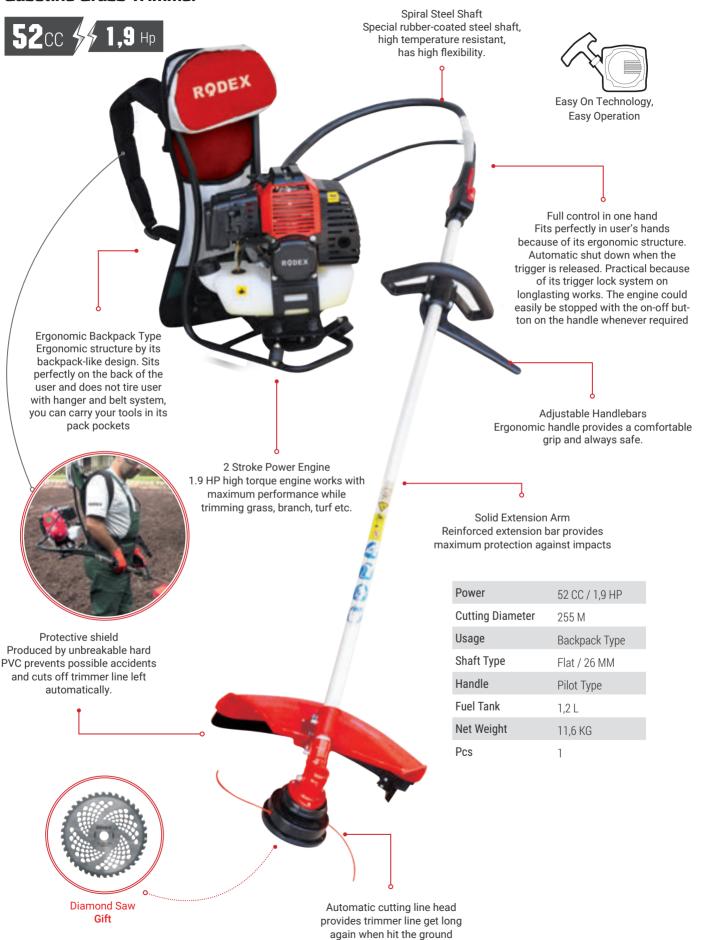



| Code   | Features       | Pcs |
|--------|----------------|-----|
| RDY512 | 1,2 MM x 15 M  | 180 |
| RDY516 | 1,6 MM x 15 M  | 180 |
| RDY518 | 2,4 MM x 15 M  | 120 |
| RDY519 | 3,0 MM x 15 M  | 120 |
| RDY520 | 2,0 MM x 126 M | 20  |
| RDY524 | 2,4 MM x 87M   | 20  |



### Grass Trimmer Line (Hexagon)

| Code   | Features      | Pcs |
|--------|---------------|-----|
| RDY418 | 2,4 MM x 15 M | 120 |
| RDY419 | 3,0 MM x 15 M | 120 |
| RDY424 | 2,4 MM x 87 M | 20  |
| RDY430 | 3,0 MM x 56 M | 20  |
| RDY433 | 3,3 MM x 46 M | 20  |
| RDY435 | 3,5 MM x 41M  | 20  |
| RDY439 | 4,0 MM x 32M  | 20  |



### Grass Trimmer Line (Tri Angle)

| Code   | Features       | Pcs |
|--------|----------------|-----|
| RDY224 | 2,4 MM x 103 M | 20  |
| RDY230 | 3,0 MM x 67 M  | 20  |
| RDY233 | 3,3 MM x 55 M  | 20  |
| RDY235 | 3,5 MM x 48 M  | 20  |
| RDY239 | 4,0 MM x 37 M  | 20  |

### **Grass Trimmer Line (Tretoil)**

| Code   | Features      | Pcs |
|--------|---------------|-----|
| RDY360 | 3,0 MM x 51 M | 20  |
| RDY363 | 3,3 MM x 46 M | 20  |
| RDY365 | 3,5 MM x 41 M | 20  |
| RDY369 | 4,0 MM x 32 M | 20  |
|        |               |     |



### Grass Trimmer Line (Saw Tooth)

| Code   | Features      | Pcs |
|--------|---------------|-----|
| RDY340 | 3,0 MM x 56 M | 20  |
| RDY343 | 3,3 MM x 46 M | 20  |



### Grass Trimmer Line (Round)

| Code   | Features        | Pcs |
|--------|-----------------|-----|
| RDY540 | 3,0 MM x 1100 M | 2   |
| RDY543 | 3,3 MM x 900 M  | 2   |



### Grass Trimmer Line (Hexagon)

| Code   | Features        | Pcs |
|--------|-----------------|-----|
| RDY440 | 3,0 MM x 1100 M | 2   |
| RDY443 | 3,3 MM x 900 M  | 2   |
| RDY445 | 3,5 MM x 825 M  | 2   |
| RDY449 | 4,0 MM x 643 M  | 2   |
|        |                 |     |



### Gear head

| Features | Pcs     |
|----------|---------|
| RDX9630  | 1       |
| RDX9636  | 1       |
|          | RDX9630 |



### **Operating Handle (Complete)**

| Code   | Features          | Pcs |
|--------|-------------------|-----|
| RDY136 | RDX9630 - RDX9636 | 1   |

| RDY330 | 3,0 MM x 51 M | 20 |
|--------|---------------|----|
| RDY333 | 3,3 MM x 42 M | 20 |

Features



Grass Trimmer Line (Round)

Features

3,0 MM x 56 M

3,3 MM x 46 M

3,5 MM x 41 M

4,0 MM x 32 M

Pcs

20

20

20 20

Pcs

Code

RDY530

RDY533

RDY535

RDY539

Code

| Code   | Features      | Pcs |
|--------|---------------|-----|
| RDY350 | 3,0 MM x 51 M | 20  |
| RDY353 | 3,3 MM x 46 M | 20  |
| RDY355 | 3,5 MM x 41 M | 20  |
| RDY359 | 4,0 MM x 32 M | 20  |
|        |               |     |



17 12 X S



Paddy Reaper

 Code
 Features
 Pcs

 RDY151
 250 MM x 430 M
 5



### Safety Helmet

| Code   | Features        | Pcs |
|--------|-----------------|-----|
| RDY019 | Protective Wire | 40  |

Ye -



| Gasoline Grass Trimmer Saw |        |                               |     |
|----------------------------|--------|-------------------------------|-----|
|                            | Code   | Features                      | Pcs |
|                            | RDY118 | Eight,<br>250 x 25,4 x 1,6 MM | 25  |



| Code   | Features | Pcs |
|--------|----------|-----|
| RDY120 | 40 Teeth | 50  |

**Gasoline Grass Trimmer Saw** 



Gasoline Grass Trimmer Saw

Code

RDY126

FeaturesPcs40 Teeth50



### **Gasoline Grass Trimmer Saw**

| Code   | Features | Pcs |
|--------|----------|-----|
| RDY128 | 40 Teeth | 50  |



| Gasoline | Grass | Trimmer | Blade |
|----------|-------|---------|-------|
|          |       |         |       |

 
 Code
 Features
 Pcs

 RDY112
 Two, 300 x 25,4 x 1,6 MM
 70



### **Gasoline Grass Trimmer Blade**

| Code   | Features                    | Pcs |
|--------|-----------------------------|-----|
| RDY115 | Two,<br>300 x 25,4 x 1,6 MM | 70  |



|  | Gasoline | Grass | Trimmer | Blade |
|--|----------|-------|---------|-------|
|--|----------|-------|---------|-------|

| Code   | Features                      | Pcs |
|--------|-------------------------------|-----|
| RDY113 | Three,<br>250 x 25,4 x 1,6 MM | 25  |



### Gasoline Grass Trimmer Blade

| Code   | Features                      | Pcs |
|--------|-------------------------------|-----|
| RDY117 | Three,<br>300 x 25,4 x 1,6 MM | 50  |



**RQDEX** -

### **Grass Trimmer Head**


| Code   | Features                  | Pcs |
|--------|---------------------------|-----|
| RDY142 | Automatic,<br>Female Type | 30  |



### **Grass Trimmer Head**

| Code   | Features                  | Pcs |
|--------|---------------------------|-----|
| RDY143 | Automatic,<br>Female Type | 32  |

For more information about products can visit our website.

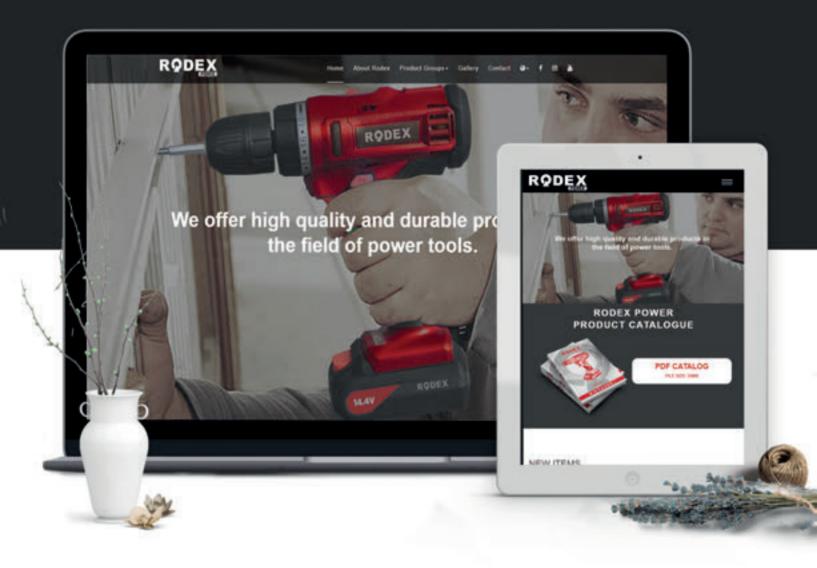





# NOTES

| <br> |
|------|
|      |
| <br> |
|      |
|      |
|      |
|      |
| <br> |
|      |
|      |
| <br> |
| <br> |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
| <br> |

# NOTES

| <br>   |
|--------|
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
| <br>   |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
|        |
| <br>   |
|        |
| <br>   |
| ······ |
|        |
| <br>   |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
|        |
| <br>   |
| <br>   |
| <br>   |
| <br>   |
|        |
| <br>   |

# NOTES

| <br>   |
|--------|
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
| <br>   |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
|        |
|        |
|        |
| <br>   |
|        |
| <br>   |
| ······ |
|        |
| <br>   |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
| <br>   |
|        |
|        |
| <br>   |
|        |
|        |
|        |
| <br>   |
| <br>   |
| <br>   |
| <br>   |
|        |
| <br>   |



- İstoç Ticaret Merkezi 2416 Sk. AKTEM PLAZA 13.Kat Bağcılar / İstanbul TÜRKİYE
   +90 212 771 04 66
- info@aktekitd.com
- www.aktekitd.com

Aktekitd

